


Accessories

- Treble Transfer-Tools. For rapid transfer of stitches and for cable stitch. \$1.50 pair plus 25c shipping.
- 2. Yarn Winder and Skein Holder. Heavy cast frame and nylon gears. \$15.95 plus \$1.00 shipping.
- 3. 33 Needle Multi-Transfer Tool. For decreasing in the middle of a row. \$3.25 plus 25c shipping.
- 4. Adjustable Needle Selector. For setting unevenly spaced pattern stitches. \$3.50 plus 25c shipping.
- Reversing Bar. For easy hem turning or reversing of knitting. \$17.95 plus \$1.50 shipping.
- Automatic Pattern Selector. For all KNITKING machines prior to Push Button. \$7.95 plus 35c shipping.
- 7. Converta Tape. For simple and speedy charting of custom knits. \$6.95 plus 30c shipping.

California residents add 5% sales tax.

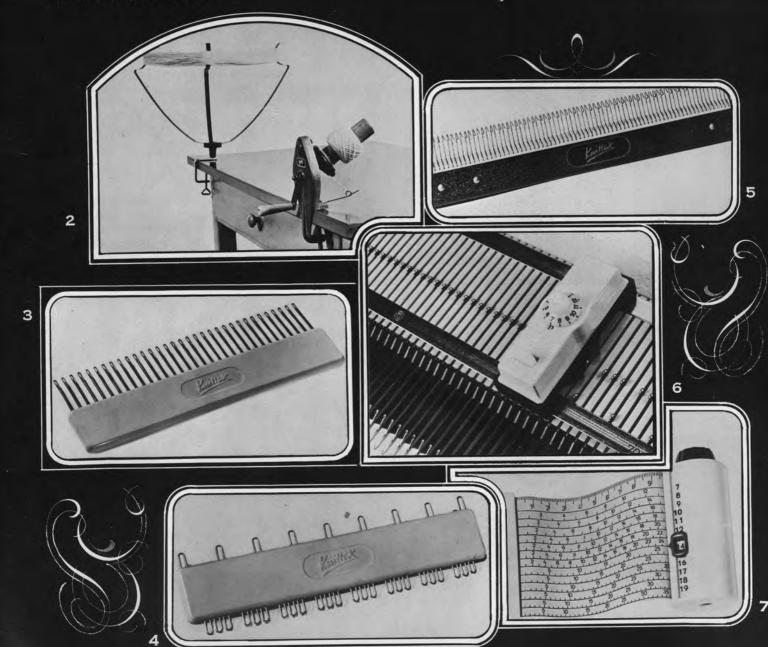

MARCH / APRIL 1970

VOL. 6 NO. 4

knitking

INDEX		PAGE NO
DK 7837	Woman's Dress and Vest	11
DK 7849	Woman's Dress	13
DK 7851	Woman's Dress	15
KG 1905	Coat Hanger Covers	16
DK 7818	Woman's Jumper	17
DK 7836	Woman's 2 piece Suit	18
DK 7830	Woman's 2 piece Dress	20
DK 7834	Woman's Blouse	21
DK 7829	Woman's Dress	22
DP 7859	Woman's Pullover	23
MK 5228	Girl's Dress	25
DK 7810	Woman's 2 piece Dress	26
KK 5222	Boy's Jacket	27
MK 5221	Girl's Jumper	28
HP 3602	Man's Cardigan	29
HP 3597	Man's Jacket	30
MK 5212	Girl's Dress	31





It's Spring again . . . and knits were never more in fashion than they are today . . . Dresses, long Vests, Suits, Jumpers . . .

anything's possible...and we have planned the best for you...and you...Knit any one of the bright and beautiful garments. Dust off your machine, give it a dab of oil and begin by knitting our lovely Cover Model outfit.

Publisher: KNITKING CORPORATION, 1128 Crenshaw Blvd., Los Angeles, Calif. 90019. Telephone: WEbster 8-2079. Published bi-monthly. Subscriptions: USA — \$6.00 annually, single copies \$1.50; Canada — \$7.00; other parts of the world — \$10.00. The entire contents of KNITKING MAGAZINE are copyright and must not be reproduced in any shape or form without the express permission, in writing of the publisher. COPYRIGHT © by KNITKING CORPORATION 1970.

Printed by George Rice & Sons, Los Angeles, California

knitking


Regular readers of KNITKING MAGAZINE will notice that we have added additional figures to the garment charts in this issue. It is done in response to the many requests from very experienced knitters who can knit from a chart without referring to printed instructions . . . We explain how the figures are read in KNITKING NEWS, but if you are not experienced enough to understand how the various shapings are made using the figures, you should ignore them entirely and follow the printed instructions.

It's a strange phenomenon, but we still get letters from readers asking why we do not put measurements on KNITKING patterns...We, of course, do just that...It may be necessary for you to add several measurements together in order to obtain the length of the dress, but all important measurements are always included in the charts...You can easily see what the bust and waist measurements, etc., of your finished garments should be.

We have received several letters from readers who want to either lengthen or shorten our garments to suit their own height and taste...So in the KNITKING NEWS in this issue, we give instructions on how to easily vary the length of skirts and dresses...We are happy to give you such Practical Knitting Hints and we hope that you will continue writing to us with any questions you have.

Recently, we had a sale of a beautiful boucle yarn called Fatme...it was one of our best yarn "Specials" ever and we sold several tons of yarn... As a result of the sale, we received many requests for patterns in Fatme, so we have some in this issue including the beautiful two piece outfit on the cover... But, because everybody was not able to take advantage of the sale, we also have instructions for the cover garments in Subita 2×3 for the dress and 2×4 for the jacket... You need 7 balls of main color and 5 balls of the second color for the jacket in 2×4 plus 14 balls of 2×3 for the dress. We will be happy to include instructions and charts with your order for Subita yarn.

Watch for the May-June edition of KNITKING MAGAZINE...it will feature beach and summer sportswear for the whole family including a stunning Bikini and Coverup.



jacquard

DK 7837

We promised you a pattern using the beautiful boucle KNITKING Sale Yarn "Fatme" and here is a sumptuous basis Dress knitted in stockinette stitch with a long long Vest in a colorful Jacquard design. The Vest is knitted by following a chart, or use your JAC 40 and Pattern No. 347.

Size 12/14. See page 11



n style





DK 7849

It's BEAUTIFUL! and so simple to knit this softly shaped Dress in stockinette stitch with a border Design that follows a chart...or you can use your JAC 40 and Pattern No. 421.


Size 12/14. See page 13

DK 7851

The "KNITKING Special" boucle Sale Yarn "Fatme" is used to knit this beautiful Dress, It really is exquisite with its soft shaping, different neckline and the lovely Jacquard border Design. Follow the chart or use your JAC 40 and Pattern No. 419.

Size 14/16. See page 15

town and country

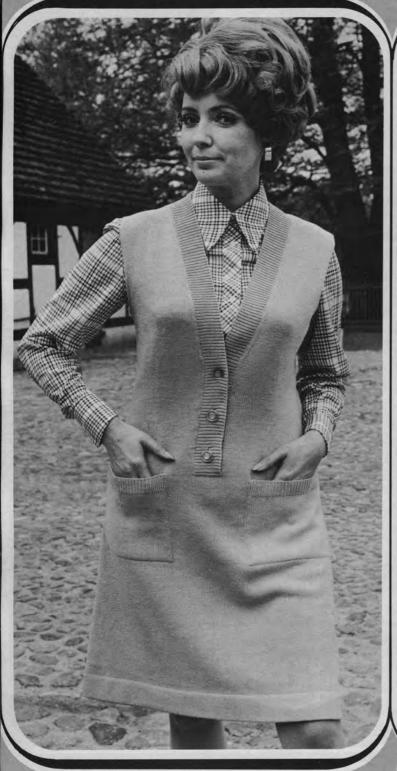



DK 7818

Ribbed bands trim the neckline and pockets of a pretty Jumper knitted in KNITKING Subita Crepe 2×4 . Soft shaping at the waistline is figure flattering.

Size 14/16. See page 17

DK 7836

Include an ultra chic Suit in your plans for Spring, Knit this one in KNITKING Subita Crepe 2 x 4 with a pattern Design on front and back sections that is worn on the purl side, The Skirt is "A" Line,

Size 12/14. See page 18





DK 7830

Wear this smartly styled two-piece Dress for town and travel. Our model is knitted in brown KNITKING Subita 2 x 4 with a flash of orange and yellow for the trim. The Skirt is knitted in 4 sections.

Size 16/18. See page 20

DP 7834

An exceptionally pretty Blouse has a new tab trim at the neckline. The diagonal pattern stitch is most attractive and is made by following a chart.

Size 16/18. See page 21

smart

match-mates





DK 7829

A charming half size dress to please those who have requested it. Our Model is knitted in Blue and White KNITKING Subita Crepe 2×3 . The striped trim is flattering.

Size 16 1/2 - 18 1/2. See page 22

DP 7859 and MK 5228

Cabled look-alikes for Mother and Daughter. Knit the Pullover for yourself, then make the perfect matching dress for your girl. The Cable Design is on the front only. Both have ribbed Belts at waistline and ribbing is used for the Collar and at the wrists.

Pullover Size 16/18. See page 23 Dress Size 12–13 years, See page 25


slimming



DK 7810

Perfect for travel...
It's a two-piece dress you will
be proud to wear any place.
Beautifully tailored with the front
trim in a contrasting color.

Size 20/22. See page 26

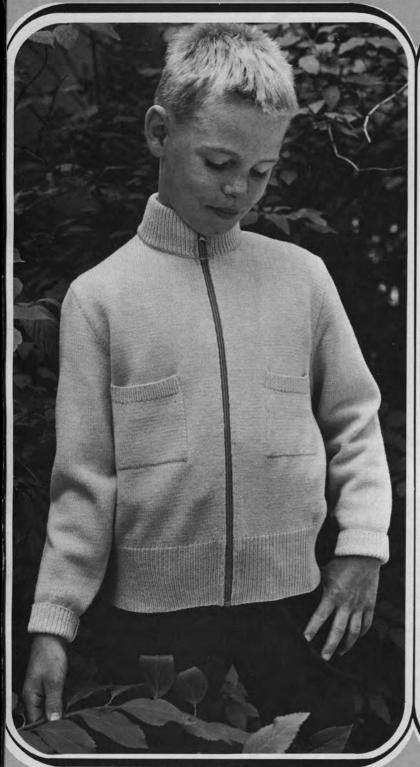



junior

KK 5222

Let the March winds blow ..., he'll keep warm in a high necked zippered Jacket knitted in stockinette stitch. The bands and collar are $1\ x$ 1 ribbing.

Size 12-13 years. See page 27

miss

MK 5221

The fashion conscious Miss will delight in this zippered Jumper. Quickly knitted in stock-inette stitch with ribbing at the top edge of the large pockets.

Size 11-12 junior. See page 28





and

HP 3602

You won't find a better looking Mans Cardigan anywhere . . . and the holding position Design is so-o easy . . . Use KNITKING Nora the perfect weight yarn for the perfect spring Cardigan.


Size 42/44. See page 29


dad

HP 3597

Use KNITKING Linen Cotton and knit this Mans Jacket in easy stockinette stitch. Three pockets and the excellent tailoring are important details.

Size 42/44. See page 30

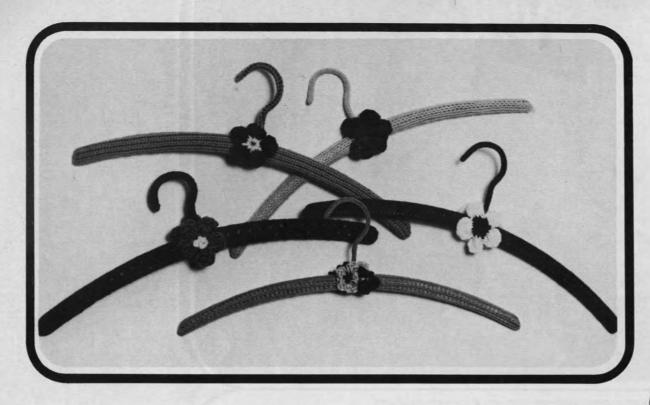



KG 1905 No. 1 and No. 2

Two patterns using different weights of yarn for bright and useful covered Coat Hangers... The bonus pattern for the Flower trim can be used for decorating other things as well — such as Slippers (try one on top of another with french knots to hold them together). Make them of light weight yarn using every needle ... add an extra petal and crochet them into pillow covers or even an afghan.

See page 16

and a cutie

MK 5212


She's a darling... and so is her Dress knitted in KNITKING Subita Dralon 2-ply. Don't worry if she spills on it...it goes into the washer and dryer and presto... ready to wear again.

Size 4-5 years. See page 31

DK 7837

SIZE: 12/14. MATERIAL: DRESS, 24% oz. (14 balls) beige; VEST 12% oz. (7 balls) and 8% oz. (5 balls) red SPECIAL YARN FATME, TENSION: KNITKING, DRESS 4 to 6; VEST 6 to 8. STITCH GAUGE: Stockinette Stitch on Dress, 16 sts. 2" 24 rows 2"; Pattern Stitch 15 sts. 2", 22 rows 2" PATTERN: Dress, Stockinette Stitch; Vest, Norwegian Design according to Line Drawing, or use JAC 40 and Pattern No. 347. In the directions each row in the Norwegian Design is counted as 1 row, but several movements of the Cam Box are needed to complete 1 row, COLLAR and Vest EDGES: K1, P1, Ribbing, DECREASES on Skirt Section: After Rows indicated, hang the 3rd st. ON EACH SIDE onto the 2nd st., then move the end sts. inward to fill the empty needle, INCREASES on Bodice and Sleeves: After Rows indicated, move the 2 end sts, ON EACH SIDE 1 needle outward, then place the 3rd st. from the row below onto the empty needle, Bind off the Ribbed sections the crochet method for ribbing. The finished length of the Dress is 3714". To shorten, after Row 48, set the Row Counter ahead up to 24 rows, to lengthen, after Row 48, set the Row Counter back as many rows as are needed. (See Stitch Gauge).

FINISHING: Block all sections to measurements given. DRESS: Join front and back section at sides and shoulders, easing in the fullness at bustline of front section. Sew sleeves together and set in, Turn under 24 rows on lower edge and hem to wrong side, Join short ends of collar. Sew 1 edge of collar to inside and 1 edge to outside of neckline. VEST: Join front and back sections at sides and shoulders. Turn under 16 rows on lower edge and hem to wrong side. Join short ends of armhole bands, then sew 1 edge to inside and 1 edge to outside of armholes. Join front bands and neckbands, then sew 1 edge of band to inside and 1 edge to outside of front edges and neckline.



collar

168 sts.

15 3/4




ON CAM BOX SIDE, bind off 4 st. after Rows 200, 201; 3 sts. after Rows 202, 203, 204, 205; 2 sts. after Rows 206, 207, 208, 209, 210, 211, 212, 213. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252. ON CAM BOX SIDE, bind off 2 sts. after Rows 254, 255; 3 sts. after Rows 256, 257, 258, 259; 5 sts. after Rows 260, 261; 13 sts. after Row 262.

ON EACH SIDE, increase 1 st. after Rows 32, 38, 44, 50, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 176, 184, 192, then knit to Row 200.

ROWS 0 to 32: Knit even, then change to stockinette st.

Cast on 71 sts. and work K1, P1, Ribbing.

Cast on 168 sts. and work 62 rows K1, P1, Ribbing, then bind off all sts.

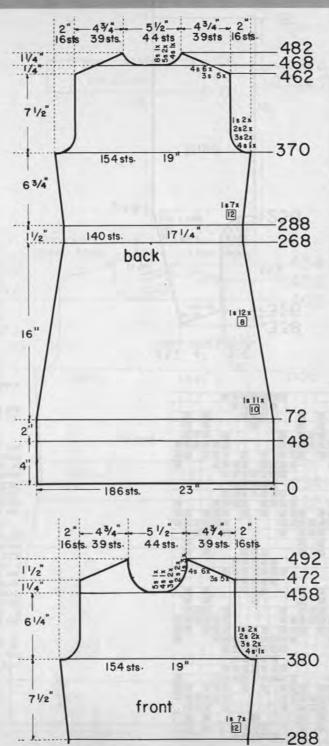

Move the Cam Box to the left side, turn the Row Counter back to 468 and complete the left half. Follow the instructions from *

* ON CAM BOX SIDE, bind off 3 sts, after Row 468 (EVEN ROWS = SHOULDER SHAPING); 8 sts, after Row 469 (ODD ROWS = NECK SHAPING); 3 sts, after Row 470; 5 sts, after Row 471; 4 sts, after Row 472; 5 sts, after Row 473; 4 sts, after Rows 474, 475, (Last time for Neck) 476, 478, 480, 482.

ON CAM BOX SIDE, bind off 3 sts. after Rows 462, 463, 464, 465, 466, 467. After Row 468 put 52 needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 4 sts. after Row 370, 371; 3 sts. after Rows 372, 373, 374, 375; 2 sts. after Rows 376, 377, 378, 379; 1 st. after Rows 380, 381, 382, 383, then knit even to Row 462.

ON EACH SIDE, increase 1 st. after Rows 288, 300, 312, 324, 336, 348, 360, then knit to Row 370.

ON EACH SIDE, decrease 1 st. after Rows 72, 82, 92, 102, 112, 122, 132, 142, 152, 162, 172, 180, 188, 196, 204, 212, 220, 228, 236, 244, 252, 260, 268. Now knit even to Row 288.

ROWS 49 to 72: Knit even.

ROWS 0 to 48: Knit even, then, if needed alter length at this point.

Cast on 186 sts, and work stockinette st.


Move the Cam Box to the left side, turn the Row Counter back to 458 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 5 sts, after Row 459 (ODD ROWS = NECK SHAPING); 4 sts. after Row 461; 3 sts. after Rows 463, 465; 2 sts. after Rows 467, 469; 1 st. after Row 471; 3 sts. after Row 472 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 473; 3 sts. after Row 474; 1 st. after Row 475 (Last time for Neck); 3 sts. after Rows 476, 478, 480; 4 sts. after Rows 482, 484, 486, 488, 490, 492.

ON CAM BOX SIDE, bind off 4 sts. after Rows 380, 381; 3 sts. after Rows 382, 383, 384, 385; 2 sts. after Rows 386, 387, 388, 389; 1 st. after Rows 390, 391, 392, 393. Now knit even to Row 458, put the 61 needles on the left side into holding position and complete the right half first.

Work the front section the same as the back section to ROW 370, then knit even to Row 380.

(Continued on next page)

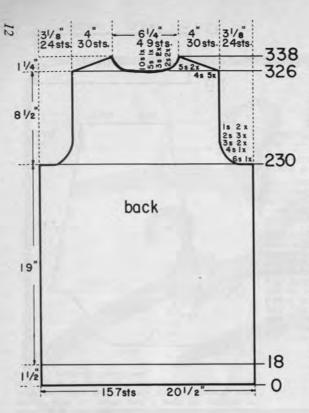

Move the Cam Box to the left side, turn the Row Counter back to 326 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 4 sts. after Rows 326 (EVEN ROWS = SHOULDER SHAPING); 10 sts. (9 sts. for the left half) after Row 327 (ODD ROWS = NECK SHAPING); 4 sts. after Row 328; 5 sts. after Row 329; 4 sts. after Row 330; 3 sts. after Row 331; 4 sts. after Row 332; 3 sts. after Row 333; 4 sts. after Row 334; 2 sts. after Row 335; 5 sts. after Row 336; 2 sts. after Row 337; 5 sts. after Row 338.


ON CAM BOX SIDE, bind off 6 sts. after Rows 230, 231; 4 sts. after Rows 232, 233; 3 sts. after Rows 234, 235, 236, 237; 2 sts. after Rows 238, 239, 240, 241, 242, 243; 1 st. after Rows 244, 245, 246, 247. Now knit even to Row 326, put 54 needles on the left side into holding position and complete the right half first.

ROWS 19 to 230: Knit even.


ROWS 0 to 18: Knit even, then work the Norwegian Design.

Cast on 157 sts, with beige and work stockinette st,







Cast on 123 sts. and work 24 rows K1, P1, Ribbing, then bind off all sts.




Cast on 170 sts. and work 24 rows K1, P1, Ribbing, then bind off all sts.



Cast on 195 sts. and work 24 rows K1, P1, Ribbing, then bind off all sts.

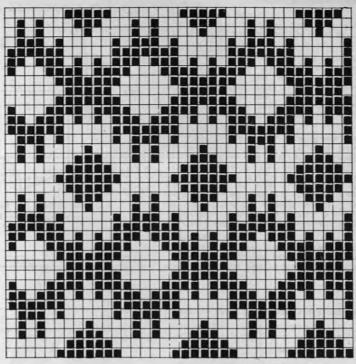



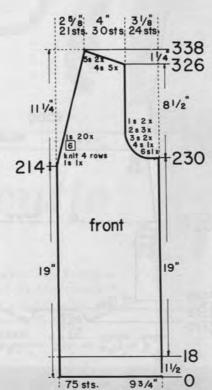

Work the left front section with reverse shapings, casting on from right to left. (The Cam Box will be on the LEFT SIDE at Row 0).

ON CAM BOX SIDE, bind off 6 sts. after Row 230, (230), 4 sts. after Row 232; 3 sts. after Rows 234, 236; (236), 2 sts. after Rows 238, 240, 242; (242), st. after Rows 244, 246. The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 248, 254, 260, 266, 272, 278, 284, 290, 296, 302, 308, 314, 320, then after Rows in (). For Shoulder bind off 4 sts. after Rows 326, (326), 328, 330, 332, (332 last time for Neck), 334; 5 sts. after Rows 336, 338.

ON OPPOSITE SIDE of CAM BOX hang the 1st st. on the 2nd st. for NECK SHAPING after Rows 214, 218, 224. Continue to decrease 1 st. ON NECK SIDE after Rows in (). Knit to Row 230.

ROWS 19 to 214: Knit even,

ROWS 0 to 18: Knit even then work the Norwegian Design.


Cast on 75 sts, with beige and work stockinette st.

DK 7849

SIZE: 12/14. MATERIAL: 241/2 oz. (14 balls) beige, 1% oz. (1 ball) turquoise and 1% oz. (1 ball) brown KNITKING Subita Crepe 2 x 4, Color Nos. 34. 45 and 27. TENSION: KNITKING 6 to 8. STITCH GAUGE: 16 sts. 2", 22 rows 2". PATTERN: Stockinette Stitch and a Norwegian Design according to Line Drawing, or use JAC 40 and Pattern No. 421. In the directions each row in the Norwegian Design is counted as 1 row, but several movements of the Cam Box are needed to complete 1 row. NECKBAND and SLEEVE EDGES: K1, P1, Ribbing. DECREASES on SKIRT SECTION: After rows indicated, hang the 4th st. ON EACH SIDE onto the 3rd st, then move the end sts. inward to fill the empty needle, IN-CREASES on BODICE and SLEEVES: After rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st. from the row below onto the empty needle. The finished length of the Dress is 351/2". To shorten, after Row 44, move the Row Counter ahead up to 22 rows. To lengthen, after Row 44, turn the Row Counter back as many rows as are needed, (See Stitch Gauge).

FINISHING: Block all sections to measurements given. Join front and back section at sides and shoulders, easing in the fullness at bustline of front section. Sew sleeves together and set in. Turn under 22 rows on lower edge and hem to wrong side. Sew neckband to neckline, Work 1 row of single crochet around back opening, Make 3 loops on one side and sew 3 buttons to other side,



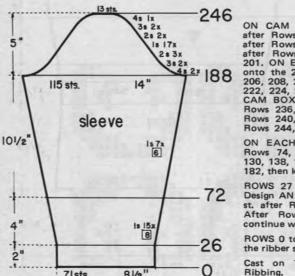

81/2"

71sts.


ON CAM BOX SIDE, bind off 4 sts. after Rows 188, 189, 190, 191; 3 sts. after Rows 192, 193, 194, 195; 2 sts. after Rows 196, 197, 198, 199, 200, 201. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234. ON CAM BOX SIDE, bind off 2 sts. after Rows 236, 237, 238, 239; 3 sts. after Rows 240, 241, 242, 243; 4 sts. after Rows 244, 245; 13 sts. after Row 246.

ON EACH SIDE, increase 1 st. after Rows 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 152, 158, 164, 170, 176, 182, then knit to Row 188.


ROWS 27 to 72: Work the Norwegian Design AND ON EACH SIDE, increase 1 st. after Rows 26, 34, 42, 50, 58, 66. After Row 72 change to beige and continue with stockinette st.

ROWS 0 to 26: Knit even, then transfer the ribber sts. to the main machine,

Cast on 71 sts. and work K1, P1,



Cast on 163 sts. and work 16 rows K1. P1, Ribbing, then bind off all sts. the crochet method for ribbing.

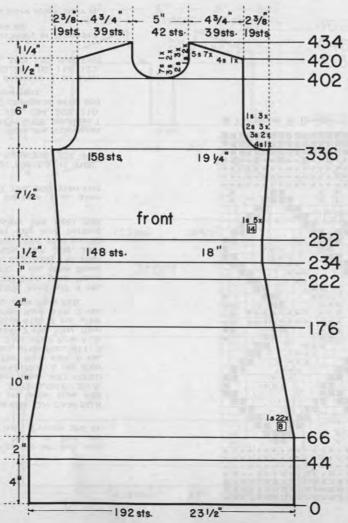

Move the Cam Box to the left side, turn the Row Counter back to 402 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 7 sts. after Row 403 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 405, 407; 2 sts. after Rows 409, 411, 413; 1 st. after Rows 415, 417; 4 sts. after Row 420 (EVEN ROWS = SHOULDER SHA-PING); 5 sts. after Rows 422, 424, 426. 428, 430, 432, 434,

ON CAM BOX SIDE, bind off 4 sts. after Rows 336, 337; 3 sts. after Rows 338, 339, 340, 341; 2 sts. after Rows 342, 343, 344, 345, 346, 347; 1 st. after Rows 348, 349, 350, 351, 352, 353, Now knit even to Row 402, then put 60 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 252, 266, 280, 294, 308, then knit even to Row 336.

ROWS 223 to 252: ON EACH SIDE. decrease 1 st. after Rows 226, 234, then knit even.


ROWS 177 to 222: Work the Norwegian Design AND ON EACH SIDE, decrease 1 st. after Rows 178, 186, 194, 202, 210, 218, After Row 222 change to beige and continue with stockinette st.

ON EACH SIDE, decrease 1 st. after Rows 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, then knit to Row 176.

ROWS 0 to 66: Knit even, or if needed, alter length after Row 44.

Cast on 192 sts, and work stockinette st.

(Continued on next page)

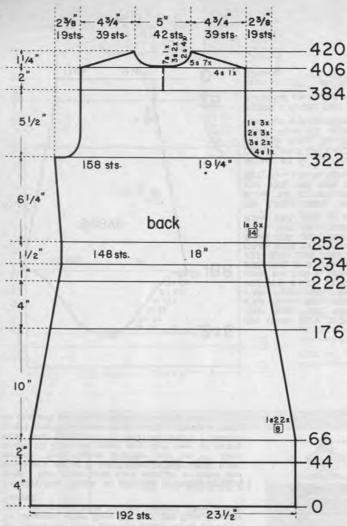

Move the Cam Box to the left side, turn the Row Counter back to 384 and complete the left half. Follow the instructions from *.

* Knit even to Row 406. ON CAM BOX SIDE, bind off 4 sts. after Row 406 (EVEN ROWS = SHOULDER SHA-PING); 7 sts. after Rows 407 (ODD ROWS = NECK SHAPING); 5 sts. after Row 408; 3 sts. after Row 409; 5 sts. after Row 410; 3 sts. after Row 411; 5 sts. after Row 412: 2 sts. after Row 413: 5 sts. after Row 414; 2 sts. after Row 415; 5 sts. after Row 416; 2 sts. after Row 417; 5 sts. after Row 418; 2 sts. after Row 419; 5 sts. after Row 420.

ON CAM BOX SIDE, bind off 4 sts. after Rows 322, 323; 3 sts. after Rows 324, 325, 326, 327; 2 sts. after Rows 328, 329, 330, 331, 332, 333; 1 st. after Rows 334, 335, 336, 337, 338, 339. Now knit even to Row 384, then put 60 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 252, 266, 280, 294, 308, then knit to Row 322.


ROWS 223 to 252: ON EACH SIDE, decrease 1 st, after Rows 226, 234, then knit even.

ROWS 177 to 222: Work the Norwegian Design AND ON EACH SIDE, decrease 1 st. after Rows 178, 186, 194, 202, 210, 218. After Row 222 change to beige and continue with stockinette st.

ON EACH SIDE, decrease 1 st. after Rows 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, then knit to Row 176.

ROWS 0 to 66: Knit even, or if needed, alter length after Row 44.

Cast on 192 sts, and work stockinette st.

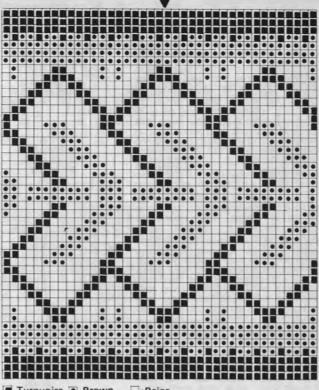

■ Turquoise ● Brown

CANADIAN READERS

Please note that KNITKING dealers based in the U.S.A. are unable to sell machines and accessories to residents of Canada. They are also unable to sell parts and service. Would all Canadian readers please contact the following appointed KNITKING dealer.

> KNITKING Sales and Service 2243 Danforth Ave. Toronto 13, Ontario

THE JAC 40 IS A MUST for fast easy knitting of



7 90 7 7 100 7 900 Order from your dealer or direct from

KNITKING 1128 Crenshaw Boulevard, Los Angeles, Calif. 90019

Shipping Cost \$1.50-California residents add 5% sales tax.

Jaquard and Ski-sweater designs

Patterns are selected-row by row-

There are over 140 cards available and illustrations of them

Jac 40's are made for most brands of machines. When ordering be sure to specify your brand of knitter as needle spacings vary. Simple to use and an essential tool for the modern knitter, Jac 40's are \$24.95 complete with 3 cards for practicing the 3 techniques, plus complete instructions.

DK 7851

SIZE: 14/16: MATERIAL: 21 oz. (12 balls) white and 10% oz. (6 balls) black KNITKING SPECIAL YARN FATME, TENSION: KNITKING 4 to 6. STITCH GAUGE: Stockinette Stitch 16 sts. 2", 24 Rows 2"; Norwegian Design 16 sts. 2", 21 rows 2". PATTERN: Stockinette Stitch with a Norwegian Design according to Line Drawing, or use JAC 40 and Pattern No. 419, a repeat of 32 sts. In the directions, each row in the Norwegian Design is counted as 1 row, but several movements of the Cam Box are needed to complete 1 row, SLEEVE EDGES: K1, P1, Ribbing. DECREASES on SKIRT SECTION: After rows indicated, hang the 3rd st. ON EACH SIDE onto the 2nd st., then move the end sts. inward to fill the empty needle. IN-CREASES on BODICE and SLEEVES: After rows indicated, move the 2 end sts. ON EACH SIDE, 1 needle outward, then place the 3rd st. from the row below onto the empty needle. The finished length of the Dress is 361/2".

FINISHING: Block all sections to measurements given. Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 20 rows on lower edge and hem to wrong side. Join neckband to front bands at shaped ends. On right side, sew band to neckline and fronts, then fold under half and sew against seamline on wrong side.


band


18 61




28 14 0

Cast on 45 sts. with black and work stockinette st. ON CAM BOX SIDE, increase 1 st. after Rows 2, 4, 6, 8, 10, 12, then decrease 1 st. after Rows 16, 18, 20, 22, 24, 26. After Row 28 bind off all 45 sts. the crochet method. Work the second front band with reverse shaping, casting on from right to left. (Cam Box will be on the LEFT SIDE at Row 0).

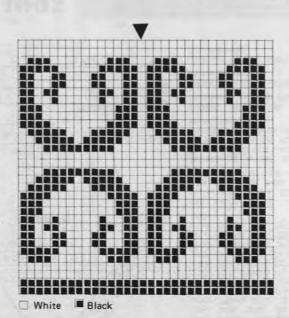



Cast on 108 sts. with black and work stockinette st. ON EACH SIDE, increase 1 st. after Rows 2, 4, 6, 8, 10, 12, then decrease 1 st. after Rows 16, 18, 20, 22, 24, 26. After Row 28 bind off all 108 sts. the crochet method.

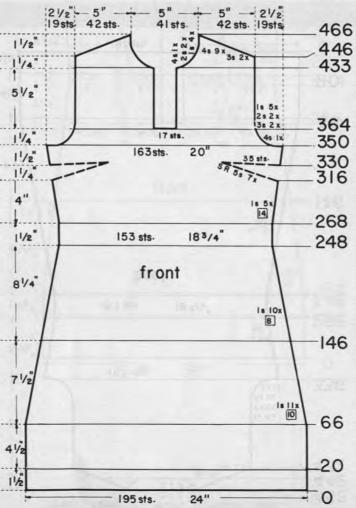

Move the Cam Box to the left side, turn the Row Counter back to 364 and complete the left half. Follow the instructions from *.

446 ON CAM BOX SIDE, bind off 4 sts. after Row 433, (ODD ROWS = NECK 433 SHAPING); 2 sts. after Rows 435, 437; 1 st. after Rows 439, 441, 443, 445; then bind off for SHOULDER, 3 sts. after Rows 446, 448; 4 sts. after Rows 450, 452, 454, 456, 458, 460, 462, 464, 466.

364 * ON CAM BOX SIDE, bind off 1 st. after Rows 364, 366, 368, then knit to Row 433.

ON CAM BOX SIDE, bind off 4 sts. after Rows 350, 351; 3 sts. after Rows 352, 353, 354, 355; 2 sts. after Rows 356, 357, 358, 359; 1 st. after Rows 360, 361, 362, 363. Now knit to Row 364, then bind off the center 17 sts., put the needles on the left side into holding position and complete the right half first.

For the Bust Darts work Short Rows, ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329. ON OPPOSITE SIDE of CAM BOX bring all needles back into working position after Rows 330, 331. ON EACH SIDE, increase 1 st. after Row 338, then knit even to Row 350.


ON' EACH SIDE, increase 1 st. after Rows 268, 282, 296, 310, then knit to Row 316.

ON EACH SIDE, decrease 1 st. after Rows 146, 156, 166, 176, 184, 192, 200, 208, 216, 224, 232, 240, 248, then knit even to Row 268.

ROWS 21 to 146: Work the Norwegian Design AND ON EACH SIDE, decrease 1 st. after Rows 66, 76, 86, 96, 106, 116, 126, 136. After Row 146 change to white and continue with stockinette st.

Rows 0 to 20: Knit even.

Cast on 195 sts. with white and work stockinette st.

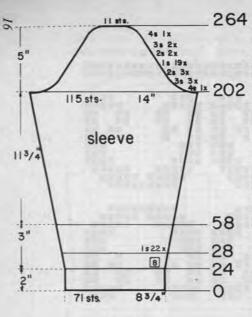

ON CAM BOX SIDE, bind off 4 sts. after Rows 202, 203; 3 sts. after Rows 204, 205, 206, 207, 208, 209; 2 sts. after Rows 210, 211, 212, 213, 214, 215. ON EACH SIDE, hang the 1st. st. onto the 2nd st. after Rows 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252. ON CAM BOX SIDE, bind off 2 sts. after Rows 254, 255, 256, 257; 3 sts. after Rows 258, 259, 260, 261. 4 sts. after Rows 262, 263; 11 sts. after Row 264.


ON EACH SIDE, increase 1 st. after Rows 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, 178, 186, 194, then knit to Row 202.

ROWS 29 to 58: Work the Norwegian Design AND ON EACH SIDE, increase 1 st. after Rows 34, 42, 50. After Row 58 change to white and continue with stockinette st.

ROWS 25 to 28: ON EACH SIDE, increase 1 st. after Row 26.

ROWS 0 to 24: Knit even, then change to stockinette st.

Cast on 71 sts. with white and work K1, P1, Ribbing.

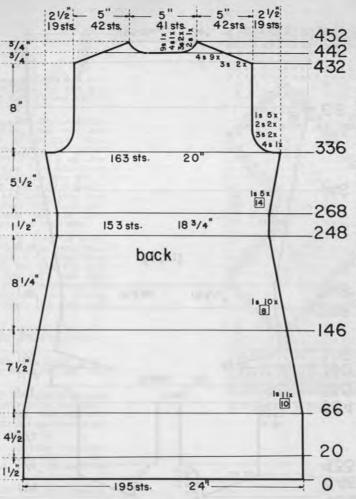

Move the Cam Box to the left side, turn the Row Counter back to 442 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 4 sts. after Row 442 (EVEN ROWS = SHOUL-DER SHAPING); 9 sts. (8 sts. for the left half) after Row 443 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 444, 445, 446; 3 sts. after Row 447; 4 sts. after Row 448; 3 sts. after Row 449; 4 sts. after Row 450; 2 sts. after Row 451; 4 sts. after Row 452.

ON CAM BOX SIDE, bind off 3 sts. after Rows 432, 433, 434, 435; 4 sts. after Rows 436, 437, 438, 439, 440, 441. After Row 442 put 44 needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 4 sts. after Rows 336, 337; 3 sts. after Rows 338, 339, 340, 341; 2 sts. after Rows 342, 343, 344, 345; 1 st. after Rows 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, then knit even to Row 432.

ON EACH SIDE, increase 1 st. after Rows 268, 282, 296, 310, 324, then knit to Row 336.

ON EACH SIDE, decrease 1 st. after Rows 146, 156, 166, 176, 184, 192, 200, 208, 216, 224, 232, 240, 248, then knit even to Row 268.

ROWS 21 to 146: Work the Norwegian Design AND ON EACH SIDE, decrease 1 st. after Rows 66, 76, 86, 96, 106, 116, 126, 136. After Row 146 change to white and continue with stockinette st.

ROWS 0 to 20: Knit even.

Cast on 195 sts. with white and work stockinette st.

KG 1905

NO. 1: Material: 1% oz. (1 ball) KNITKING Sonika Dralon will cover 3 or more hangers. Tension 7 or 8, Gauge: 14 sts. 19 Rows 2".

FINISHING: Pull the 4 needle cord over the wire hook being sure to get the wire inside, then turn the wider space of cord toward the inside of hook. Thread a needle with end of yarn and pull it down over the wood and wind it around end of wire that sticks out at the bottom, then up again to bottom of cord. Do the same thing to the other side and anchor firmly. Close the top end so the hook cannot come through. Using latch tool, begin from the cast-on edge and pick up 2 cross threads, twist them, then pick up 2 cross threads and pull through loop. Continue to pull 2 cross threads through st. on latch tool to the top of cord, pull end through to hold. Pull the tube over one end of wood so that the cast on edge will go up against the wire hook. Do the same to other side, Pull up end of tube tightly and secure. Sew the center pieces together catching tube on each side. Cover the seams with flower of your choice,

HANGER NO. 2: Material: 1½ oz. (1 ball) KNIT-KING Frigate will cover 2 or more hangers. Tension 7 or 8 OVER EVERY OTHER NEEDLE. Gauge: 10 sts. 12 rows 2".


FINISHING: Pull the wire cord over the hook, the larger completed tube over ends of hanger and finish as in directions for hanger No. 1.



No. 1

Make 2. Cast on 9 sts. Set your machine for making a cord. (KNITKING machines, pull up or push in RIGHT Control Button) As you knit, do not pull down hard on the strip, just hold it with your left hand so the strand that forms as you knit from left to right will stay down in place. Knit 164 rows, then take the stitches off on the end of yarn.

For the Wire hook, make a 4 needle cord using Tension 2 or 3 and knit 120 rows. Take off on end of yarn and pull up.



No. 2

Make 2. Cast on 9 sts. over every other needle. Knit to ROW 66, break yarn leaving an end to sew with. Allow the first and last stitches to drop from needle and take off the center 7 sts. onto end of yarn. With a size F crochet hook, crochet from side to side by pulling out 2 rows at a time and pull the two strands through, first from one side and then the other. Secure with end of yarn at the top.


Make a 3 needle cord for wire hook over every other needle, (see directions for cord on first hanger). Use Tension 3 or 4 and knit 68 rows. Take off on end of yarn and pull up.

DK 7818


SIZE: 14/16, MATERIAL: 21 oz, (12 balls) blue KNITKING Subita Crepe 2 x 4, Color No. 18. TENSION: KNITKING 6 to 8, STITCH GAUGE: Stockinette Stitch 16 sts. 2", 21 rows 2". PAT-TERN: Stockinette Stitch, NECKLINE and POCK-ET EDGES: K1, P1, Ribbing. Make ALL shapings of 1 stitch Full-fashion. DECREASES: After rows indicated, hang the 3rd st. on the appropriate sides onto the 2nd st., then move the end stitches inward to fill the empty needle. INCREASES: After rows indicated, move the 2 end sts. on the appropriate sides 1 needle outward, then place the 3rd st, from the row below onto the empty needle. Begin DARTS by hanging the stitches indicated on the diagram together, then move the end sts. inward to fill the empty needles. The following Dart decreases, then increases lie directly above. Bind off all ribbed sections the crochet method for ribbing, Finished length of the Jumper is 3914". To alter length, see Practical Hint.

FINISHING: Block all sections to measurements given, Join front and back section at sides and shoulders. Turn under 3 sts. around armholes and hem to wrong side. Turn under 21 rows on lower edge and hem to wrong side. Join Neckband to Front bands, then sew band to jumper. Sew pockets in place. Finish buttonholes, sew on buttons.







Cast on 59 sts. and work 62 rows stockinette st., then transfer every other st. to the Ribber and work 14 rows K1, P1, Ribbing. After Row 76 bind off all sts.



Cast on 75 sts. and work 26 rows K1, P1, Ribbing, then bind off all sts.



Cast on 197 sts. and work K1, P1, Ribbing. Make buttonholes after Row 13 over the 13th-19th, 37th-43rd, 61st-67th sts. counting from the left side. After Row 26 bind off all sts. Work the Button Band the same but omit the buttonholes.

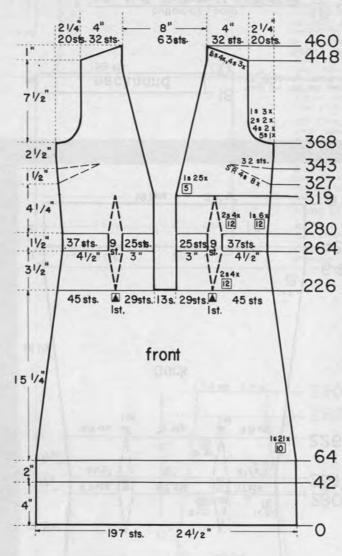

Move the Cam Box to the left side, turn the Row Counter back to 226 and complete the left half. Follow the instructions from *.

For SHOULDER, bind off 4 sts. after Rows 448, 450, 452; 5 sts. after Rows 454, 456, 458, 460.

ON CAM BOX SIDE, bind off 5 sts. after Row 368; (369), 4 sts. after Rows 370, 372; 2 sts. after Rows 374, (374) 376; 1 st. after Rows 378, (379), 380, 382. The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 384, 389, 394, 399, 404, 409, 414, 419, 424, 429, 434, 439, then knit to Row 448.

Decrease 1 st. ON NECK SIDE, after Rows 319, 324, then decrease 1 st. ON NECK SIDE after ALL Rows in (). For the Bust Dart work Short Rows. ON OPPOSITE SIDE of CAM BOX, put into holding position 4 needles after Rows 327, 329, (329), 331, 333, (334), 335, 337, 339, (339), 341. After Row 343 bring all needles back into working position. ON CAM BOX SIDE, Increase 1 st. for SIDE SEAM after Rows 344, (344), (349), (354), 356. The Side Seam Shaping is now completed. Decrease 1 st. ON NECK SIDE after Rows 359, 364, then knit to Row 368.

Increase 1 st. for the SIDE SEAM and 2 sts. for the DART after Rows 280, 292, 304, 316. The Dart is now completed. Knit to Row 319.

* Decrease 1 st. for the SIDE SEAM after Rows in (). Decrease 2 sts. for the DART after Rows 226, (234), 238, (244), 250, (254), 262, (264), then knit to Row 280.

ON EACH SIDE, decrease 1 st. after Rows 64, 74, 84, 94, 104, 114, 124, 134, 144, 154, 164, 174, 184, 194, 204, 214, 224. Now knit to Row 226, then bind off the center 13 sts., put the sts. on the left side on a stitch holder and complete the right half first.


ROWS 0 to 64: Knit even.

Cast on 197 sts. and work stockinette st.


SIZE: 10/12, MATERIAL: 33% oz. (19 balls) red KNITKING Subita Crepe 2 x 4, Color No. 31, TENSION: KNITKING: 6 to 8, STITCH GAUGE: Stockinette Stitch 16 sts. 2", 22 rows 2"; Pattern Stitch 18 sts. 2", 26 rows 2". PATTERN: Skirt and sleeves. Stockinette Stitch worn on the knit side; Front and back sections, Pattern Stitch according to Line Drawing, worn on the purl side, SKIRT DECREASES: After Rows indicated, hang the 4th st. ON EACH SIDE onto the 3rd st., then move the end sts. inward to fill the empty needle. SLEEVE INCREASES: After Rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st, from the row below onto the empty needles. The finished length of the skirt, including the waist band is 23". To shorten, after Row 44, set the Row Counter ahead up to 22 rows, to lengthen, after Row 44, set the Row Counter back as many rows as are needed. (See Stitch Gauge).


FINISHING: Block all sections to measurements given, SKIRT: Weave all sections together, 1 st. in on each edge, leaving an opening on the left side for the zipper. Make a narrow hem around the opening. (If skirt is not to be lined, sew all the way up). Turn under 11 rows on upper and 22 rows on lower edge and hem to wrong side. Insert an elastic band into the upper hem. Set in zipper, then line the skirt, JACKET: Join front and back sections at sides and shoulders. Sew sleeves together and set in. Sew bands to front edges. Sew neckband to neckline. Finish buttonholes. Sew on buttons. Close the belt with 2 snaps, then sew 2 buttons to belt.





Cast on 23 sts. and work K1, P1, Ribbing, Knit even to Row 350, then decrease 2 sts. ON EACH SIDE after Rows 350, 352, 354, 356, 358. After Row 360 hang the 3 remaining sts. together and bind off,

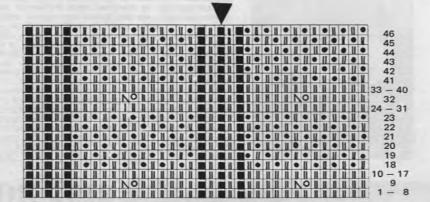

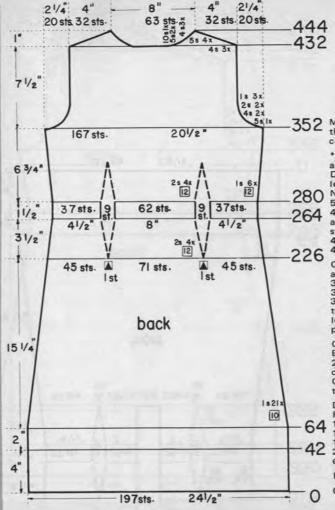

Move the Cam Box to the left side, turn the Row Counter back to 432 and complete the left half.

* ON CAM BOX SIDE, bind off 4 sts. after Row 432 (EVEN ROWS = SHOUL-DER SHAPING): 10 st. (9 sts. for the left half) after Row 433 (ODD ROWS = 280 NECK SHAPING); 4 sts. after Row 434: 5 sts. after Row 435; 4 sts. after Row 436; 5 sts. after Rows 437, 438; 4 sts. after Row 439; 5 sts. after Row 440; 4 sts. after Row 441; 5 sts. after Row 442; 4 sts. after Row 443: 5 sts. after Row 444.


> ON CAM BOX SIDE, bind off 5 sts. after Rows 352, 353; 4 sts. after Rows 354, 355, 356, 357; 2 sts. after Rows 358, 359, 360, 361; 1 st. after Rows 362, 363, 364, 365, 366, 367. Now knit to Row 432, then put 63 needles on the left side into holding position and complete the right half first.


> ON EACH SIDE, increase 1 st, and for EACH DART increase 2 sts. after Rows 280, 292, 304, 316. The Darts are now completed. Continue to increase 1 st. ON EACH SIDE after Rows 328, 340, then knit to Row 352.

> Decrease 2 sts, for EACH DART after Rows in (), ON EACH SIDE, decrease 1 st. after Rows 64, 74, 84, 94, 104, 114, 124, 134, 144, 154, 164, 174, 184, 194, 204, 214, 224, (226), 234, (238), 244, (250), 254, (262), 264, then knit even to Row 280.


ROWS 0 to 64: Knit even,

Cast on 197 sts. and work stockinette st.





Cast on 187 sts. and work K1, P1, Ribbing, Make buttonholes after Row 8 over the 7th-13th, 37th-43rd, 67th-73rd, 97th-103rd, 127th-133rd, 157th-163rd sts. counting from the left side. After Row 16 bind off all sts. Work the button band the same, but omit the buttonholes.



Work the second front section with reverse shapings, casting on from right to left. (The Cam Box will be on the left side at Row 0).


ON CAM BOX SIDE, bind off 5 sts. after Row 273 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 275, 277; 2 sts. after Rows 279, 281, 283; 1 st. after Rows 285, 287, 289, 291, 293; 4 sts. for SHOULDER after Rows 298, 300, 302, 304, 306, 308; 5 sts. after Rows 310, 312, 314.

ON CAM BOX SIDE, bind off 6 sts. after Row 198; 3 sts. after Rows 200, 202; 2 sts. after Rows 204, 206, 208; 1 st. after Rows 210, 212, 214, 216, then knit even to Row 273.

ROWS 17 to 198: Knit even.

ROWS 0 to 16: Knit even, then set up for Pattern, having the first 13 sts. ON OPPOSITE SIDE of CAM BOX on the main machine and work the Pattern Stitch.

Cast on 83 sts. and work K1, P1, Ribbing.

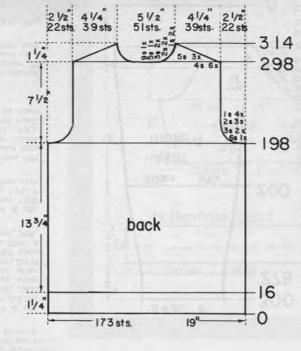

Move the Cam Box to the left side, turn the Row Counter back to 298 and complete the left half. Follow the instructions from *.


* ON CAM BOX SIDE, bind off 4 sts. after Row 298 (EVEN ROWS = SHOUL-DER SHAPING); 9 sts. (8 sts. for the left half) after Row 299 (ODD ROWS = NECK SHAPING); 4 sts. after Row 300; 5 sts. after Row 301; 4 sts. after Row 302; 3 sts. after Row 303; 4 sts. after Row 304; 3 sts. after Row 305; 4 sts. after Row 306; 2 sts. after Row 307; 4 sts. after Row 308; 2 sts. after Row 309; 5 sts. after Row 310; 1 st. after Row 311; 5 sts. after Row 312; 1 st. after Row 313; 5 sts. after Row 314; 5 sts. after Row 314;

ON CAM BOX SIDE, bind off 6 sts. after Rows 198, 199; 3 sts. after Rows 200, 201, 202, 203; 2 sts. after Rows 204, 205, 206, 207, 208, 209; 1 st. after Rows 210, 211, 212, 213, 214, 215, 216, 217. Now knit even to Row 298, put 64 needles on the left side into holding position and complete the right half first.

ROWS 17 to 198: Knit even.

ROWS 0 to 16: Knit even, then set up for Pattern and work the Pattern Stitch.

Cast on 173 sts. and work K1, P1, Ribbing.



ON CAM BOX SIDE, bind off 6 sts. after Rows 182, 183; 3 sts. after Rows 184, 185, 186, 187; 2 sts. after Rows, 188, 189, 190, 191, 192, 193, 194, 195. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230. ON CAM BOX SIDE, bind off 2 sts. after Rows 232, 233; 3 sts. after Rows 234, 235, 236, 237; 5 sts. after Rows 238, 239; 13 sts. after Row 240.

ON EACH SIDE, increase 1 st. after Rows 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 110, 116, 122, 128, 134, 140, 146, 152, 158, 164, 170, 176, then knit to Row 182.

ROWS 0 to 16: Knit even, then change to stockinette st.

Cast on 67 sts. and work K1, P1, Ribbing.



Work 3 more sections the same.

ON EACH SIDE, decrease 1 st. after Rows 66, 76, 86, 96, 106, 116, 126, 136, 146, 156, 164, 172, 180, 188, 196, 204, 212, 220, 228, 236, 244, 252, 260, 268. Now knit even to Row 290, then bind off the remaining 54 sts.

ROWS 45 to 66: Knit even,


ROWS 0 to 44: Knit even, then if needed, alter length at this point.

Cast on 102 sts, and work stockinette st.

SIZE: 16/18. MATERIAL: 26% oz. (15 balls) brown and small amounts of vellow and orange KNITKING Subita 2 x 4, Color Nos. 27, 39, and 38. TENSION: KNITKING 6 to 8. STITCH GAUGE: 16 sts. 2", 22 rows 2", PATTERN: Stockinette Stitch with color stripes on Collar and Front Bands. EDGES: K1, P1, Ribbing. Skirt Decreases: After rows indicated, hang the 4th st. ON EACH SIDE onto the 3rd st, then move the end sts, inward to fill the empty needle, Sleeve Increases: After rows indicated, move the 2 end sts, ON EACH SIDE 1 needle outward, then place the 3rd st. from the row below onto the empty needle. The finished length of the Skirt including the waist band is 24". To shorten, after Row 44, set the Row Counter ahead up to 22 rows. To lengthen, set Row Counter back as many rows as are needed. (See Stitch Gauge)

FINISHING: Block all sections to measurements given, SKIRT: Weave all sections together, 1 st, in on each edge, leaving the upper edge of 1 seam open for the zipper. (If skirt is not to be lined, sew all the way up). Make a narrow hem around the opening. Turn under 11 rows on upper and 22 rows on lower edge and hem to wrong side, Insert an elastic band into the upper hem. Set in zipper, then line the skirt, BLOUSE: Join front and back section at sides and shoulders. Sew sleeves together and set in. Sew 1 edge of buttonhole band to inside and 1 edge to outside of right front edge. Sew button band to left front edge in the same manner. Sew collar to Neckline in the same manner, leaving a small opening on the right side for a buttonhole, Finish buttonholes, sew on buttons,





Move the Cam Box to the left side, turn the Row Counter back to 240 and complete the left half. Follow the instructions from *.


* ON CAM BOX SIDE, bind off 3 sts. after Row 240 (EVEN ROWS = SHOUL-DER SHAPING); 9 sts. after Row 241 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 242, 243; 4 sts. after Row 244; 3 sts. after Row 245; 4 sts. after Row 246; 2 sts. after Row 247; 4 sts. after Row 248; 2 sts. after Row 249; 4 sts. after Row 250; 2 sts. after Row 251; 4 sts. after Row 252; 1 st. after Row 253; 4 sts. after Row 254; 1 st. after Row 255; 4 sts. after Row 256; 1 st. after Row 256; 1 st. after Row 256; 1 st. after Row 257; 4 sts. after Row 256; 1 st. after Row 257; 4 sts. after Row 258.

ON CAM BOX SIDE, bind off 6 sts. after Rows 152, 153; 3 sts. after Rows 154, 155, 156, 157; 2 sts. after Rows 158, 159, 160, 161, 162, 163; 1 st. after Rows 164, 165, 166, 167, 168, 169. Now knit even to Row 240, put 62 needles on the left side into holding position and complete the right half first.

ROWS 21 to 152: Knit even.

ROWS 0 to 20: Knit even, then change to stockinette st.

Cast on 166 sts. and work K1, P1, Ribbing.



Move the Cam Box to the left side, turn the Row Counter back to 20 and complete the left half. Follow the instructions from *.

ON CAM BOX SIDE, bind off 4 sts. after Row 237 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 239, 241; 2 sts. after Rows 243, 245, 1 st. after Rows 247, 249, 251, 253; 3 sts. after Row 254 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 255 (last time for Neck); 3 sts. after Row 256; 4 sts. after Rows 258, 260, 262, 264, 266, 268, 270, 272.

ON CAM BOX SIDE, bind off 6 sts. after Row 166; 3 sts. after Rows 188, 170; 2 sts. after Rows 172, 174, 176; 1 st. after Rows 178, 180, 182, then knit even to Row 237.


For the Bust Dart work Short Rows. ON OPPOSITE SIDE of CAM BOX, put into holding position 5 needles after Rows 131, 133, 135, 137, 139, 141, 143. After Row 145 bring all needles back into working position and knit to Row 166.

*ROWS 21 ro 131: Knit even.

ROWS 0 to 20: Knit even, then change to stockinette st., bind off the center 10 sts., put the 78 sts. on the left side on a stitch holder and complete the right half first.

Cast on 166 sts. and work K1, P1, Ribbing.





Cast on 138 sts. with yellow, work stockinette st. and stripes of 6 rows yellow, 3 rows brown, 14 rows orange, 3 rows brown and 6 rows yellow. After Row 32 bind off all sts.

Work 3 more sections the same.

ON EACH SIDE, decrease 1 st. after Rows 66, 80, 94, 108, 122, 136, 150, 164, 178, 188, 198, 208, 218, 228, 238, 248, 258, 268, 278. Now knit even to Row 300, then bind off the remaining 64 sts.

44 ROWS 45 to 66: Knit even.

0

ROWS 0 to 44: Knit even, then, if needed, alter length at this point.

Cast on 102 sts. and work stockinette st.

SIZE: 16/18, MATERIAL: 15% oz. (9 balls) pink KNITKING Subita Crepe 2 x 3, Color No. 117. TENSION: Stockinette Stitch 3 to 5; Pattern Stitch 4 to 6. STITCH GAUGE: Stockinette Stitch 17 sts. 2", 24 rows 2"; Pattern Stitch 17 sts. 2", 30 rows 2". PATTERN: Holding position Design according to Line Drawing or use JAC 40 and Pattern No. 403. EDGES and COLLAR: Stockinette Stitch. The purl side on all sections is the right side, Make increases on side seams, sleeves and collar Full-fashion. After Rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st. from the Row below onto the empty needle.

FINISHING: Block all sections to measurements given. Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 1" at lower edge and sleeve edges and hem to wrong side. Weave collar together at center back, then fold in half. Sew rounded shapings together then continue down the right side seam for 2" and the left side seam for 3%". Sew 1 edge of open collar edge to inside and 1 edge to outside of neckline. On the front, cross over the rounded edges (see picture) and fasten with 3 buttons.



3" 43/4" ... 25sts 4|sts 43/4 53/4_ 41sts. 25sts 51 sts. 384 11/2 360 71/4 2s 2x s 25x 4s Ix 211/4 183 sts. 6slx 192 front 1s 5x 84 24 173 sts 20'

Move the Cam Box to the left side, turn the Row Counter back to 252 and complete the left half. Follow the instructions from *.


* ON NECK SIDE, hang the 1st st. onto the 2nd st. after Rows in (). ON CAM BOX SIDE, bind off 3 sts. after Row 252, 2 sts. after Rows 256, (257), 260; (262), 1 st. after Rows 264, (267), 268, 272; (272). The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 277, 282, 287, 292, 297, 302, 307, 312, 317, 322, 327, 332, 337, 342, 347, 352, 357. Continue to decrease 1 st. ON NECK SIDE after Rows in (). For SHOULDER, bind off 3 sts. after Rows 360, 362, (362), 364, 366, (367), 368, 370, 372, (372), 374, 376, (377, last time for Neck), 378, 380, 4 sts. after Rows 382, 384.


ON CAM BOX SIDE, bind off 6 sts. after Rows 240, 241; 5 sts. after Rows 244, 245; 4 sts. after Rows 248, 249. After Row 252 hang the center st. onto the neighboring needle, put the 76 sts. on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 84, 110, 136, 162, 188. After Row 192 work Short Rows for the Bust Darts. ON OPPOSITE SIDE of CAM BOX put into holding position 4 needles after Rows 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215. ON OPPOSITE SIDE of CAM BOX, bring all needles back into working position after Rows 216, 217, then knit even to Row 240.

ROWS 0 to 24: Knit even, then work the Holding Position Design.

Cast on 173 sts. and work stockinette st.





ON CAM BOX SIDE, bind off 6 sts. after Rows 50, 51; 3 sts. after Rows 52, 53, 54, 55; 2 sts. after Rows 56, 57, 58, 59, 60, 61, 62, 63. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98. ON CAM BOX SIDE, bind off 2 sts. after Rows 100, 101; 3 sts. after Rows 102, 103, 104, 105; 4 sts. after Rows 106, 107; 15 sts. after Row 108.


ON EACH SIDE, increase 1 st. after Rows 14, 20, 26, 32, 38, 44, then knit to Row 50.

ROWS 0 to 14: Knit even, then change to stockinette st.

Cast on 103 sts, and work K1, P1, Ribbing.

Cast on 152 sts. with yellow, work stockinette st. and the same striped pattern as the collar. Make buttonholes after Rows 8 and 24 over the 17th-21st, 44th-48th, 71st-75th, 98th-102nd, 125th-129th sts. counting from the left side. After Row 32 bind off all sts.

Work the button hand the same, but omit the buttonholes.

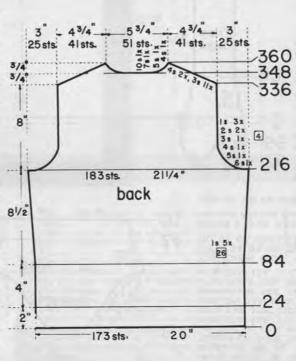

Move the Cam Box to the left side, turn the Row Counter back to 348 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 3 sts. after Row 348 (EVEN ROWS = SHOUL-DER SHAPING); 10 sts. (9 sts. for the left half) after Row 349 (ODD ROWS = NECK SHAPING); 3 sts. after Row 350; 7 sts. after Row 351; 3 sts. after Row 352; 5 sts. after Row 353; 3 sts. after Row 354; 4 sts. after Row 355; 3 sts. after Row 356; 4 sts. after Row 358, 360.

ON CAM BOX SIDE, bind off 3 sts. after Rows 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347. After Row 348 put 48 needles on the left side into holding position and complete the right half first.


ON CAM BOX SIDE, bind off 6 sts. after Rows 216, 217; 5 sts. after Rows 220, 221; 4 sts. after Rows 224, 225; 3 sts. after Rows 228, 229; 2 sts. after Rows 232, 233, 236, 237; 1 st. after Rows 240, 241, 244, 245, 248, 249, then knit even to Row 336.


ON EACH SIDE, increase 1 st. after Rows 84, 110, 136, 162, 188, then knit even to Row 216.

ROWS 0 to 24: Knit even, then work the Holding Position Design,

Cast on 173 sts, and work stockinette st.

(Continued on next page)

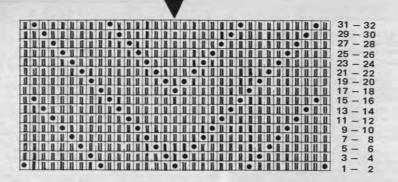



ON CAM BOX SIDE, bind off 4 sts. after Rows 72, 73, 74, 75; 3 sts. after Rows 76, 77, 78, 79, 80, 81; 2 sts. after Rows 82, 83, 84, 85, 86, 87, 88, 89. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 90, 94, 96, 98, 102, 104, 106, 110, 112, 114, 118, 120, 122, 126, 128, 130, 134, 136, 138, 142, 144. ON CAM BOX SIDE, bind off 2 sts. after Rows 146, 147, 148, 149; 4 sts. after Rows 150, 151, 152, 153, 13 sts. after Rows 154.

ON EACH SIDE, increase 1 st. after Rows 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, then knit to Row 72.


ROWS 0 to 24: Knit even, then work the Holding Position Design.

Cast on 105 sts, and work stockinette st.

DK 7829


SIZE: 161/2-181/2, (Bust 39"-41"), MATERIAL: 24½ oz. (14 balls) blue and 3½ oz. (2-balls) white KNITKING Subita Crepe 2 x 3, Color No. 137 and 104. TENSION: KNITKING 4 to 6. STITCH GAUGE: 17 sts. 2", 25 rows 2". PATTERN: Stockinette Stitch and a Striped Pattern on the Sleeves and Band of 6 rows white, 4 Rows blue, 6 rows white, 4 rows blue, 12 rows white, 4 rows blue, 6 rows white, 4 rows blue and 6 rows white, BELT: K1, P1, Ribbing. DECREASES on Skirt Section and Neckline: After Rows indicated, hang the 3rd st, on the appropriate sides onto the 2nd st., then move the end sts, inward to fill the empty needle. Begin the Darts, by hanging the sts. marked on the diagram together, then move the end sts. inward to fill the empty needles. The following decreases, then increases for the Darts lie directly above, INCREASES on Bodice and Sleeves: After Rows indicated, move the 2 end sts. on the appropriate sides 1 needle outward, then place the 3rd st. from the row below onto the empty needle. The finished length of the Dress is 39%". To shorten, after Cast-on, set the Row Counter ahead as many rows as are needed. To lengthen, knit as many rows as are needed, then set the Row Counter to 0. (See Stitch Gauge).

FINISHING: Block all sections to measurements given, Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 2" at lower edge and sleeves edges and hem to wrong side. Join bands at center back, then sew 1 edge to inside and 1 edge to outside of neckline and front edges. Finish buttonholes, sew on buttons.




Cast on 174 sts. with white, work stockinette st. and the Striped Pattern. Make buttonholes after Rows 12 and 40 over the 11th-15th, 38th-42nd, 65th-69th sts. counting from the left side. After Row 52 bind off all sts, Work the second band the same but omit the





Cast on 17 sts. and work 770 rows K1, P1, Ribbing, then bind off all sts.




Move the Cam Box to the left side, turn the Row Counter back to 166 and complete the left half. Follow the instructions from *.

*ON CAM BOX SIDE, bind off 1 st. after Rows 166, 167, 168, 169, 170, 171, 172, 173; 2 sts. after Rows 174, 175, 176, 177. After Row 178 bind off the remaining 4 sts.

ON EACH SIDE, increase 1 st. after Rows 92, 100, 108, 116, 124, 132, 140, 148, 156, 164. Now knit to Row 166, put 20 sts. on the left side into holding position and complete the right half first.

ROWS 0 to 92: Knit even.

Cast on 20 sts. with contrast waste yarn and work several rows. Change to main yarn, turn Row Counter to 0 and work stockinette st.




ON CAM BOX SIDE, bind off 5 sts. after Rows 176, 177; 4 sts. after Rows 178, 179; 3 sts. after Rows 180, 181, 182, 183, 184, 185; 2 sts. after Rows 186, 187, 188, 189, 190, 191. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230. ON CAM BOX SIDE, bind off 2 sts. after Rows 232, 233; 3 sts. after Rows 234, 235; 5 sts. after Rows 236, 237, 238, 239; 11 sts. after Row 240. Continue to increase 1 st. ON EACH

SIDE after Rows 52, 58, 64, 70, 76, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, then knit even to Row 176.

ROWS 0 to 52: ON EACH SIDE, decrease 1 st. after Rows 6 12, 18, 24. Now, ON EACH SIDE increase 1 st. after Rows 28, 34, 40, 46. After Row 52 continue with blue.

Cast on 95 sts. with white, work stockinette st. and the Striped Pattern.

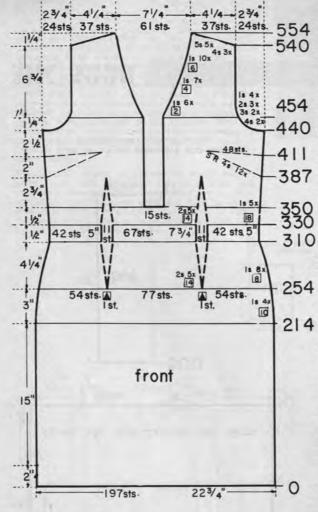

Move the Cam Box to the left side, turn the Row Counter back to 350 and complete the left half. Follow the instructions from *.

ON NECK SIDE, decrease 1 st. after Rows in (). ON CAM BOX SIDE, bind 11/4" off 4 sts. after Rows 440, 442; 3 sts. after Rows 444, 446; 2 sts. after Rows 448, 450, 452; 1 st. after Rows 454, (454), 456, (456), 458, (458), 460, (460). The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 462, 464, 466, 470, 474, 478, 482, 486, 490, 494, 500, 506, 512, 518, 524, 530, 536, then after Rows in (). For SHOULDER bind off 4 sts. after Rows 540, 542, (542), 544; 5 sts. after Rows 546, 548, (548), 550, 552,

For the Bust Dart, work Short Rows. ON OPPOSITE SIDE of CAM BOX, put into holding position 4 needles after Rows 387, 389, 391, 393, 395, 397, 399, 401, 403, 405, 407, 409. After Row 411 bring all needles back into working position, Increase 1 st, ON CAM BOX SIDE after Row 426, then knit 41/4 even to Row 440.


Continue to increase 2 sts. for the Dart after Rows in (). (358), AND ON CAM BOX SIDE, increase 1 st. after 3" Rows 366, (372), 384, (386), then knit to Row 387.

Increase 2 sts. for each Dart after Rows in (), ON EACH SIDE, increase 1 st. after Rows 330, (330), (344), 348. After Row 350 bind off the center 15 sts., put the sts, on the left side into holding position or on a stitch holder and complete the right half first.

Decrease 2 sts. for each Dart after Rows in (), ON EACH SIDE, decreases 1 st. after Rows 214, 224, 234, 244, 254, (254), 262, (268), 270, 278, (282), 286, 294, (296), 302, 310, (310), then knit even to Row 330.

ROWS 0 to 214: Knit even.

Cast on 197 sts. and work stockinette st. If needed, alter length at this point,

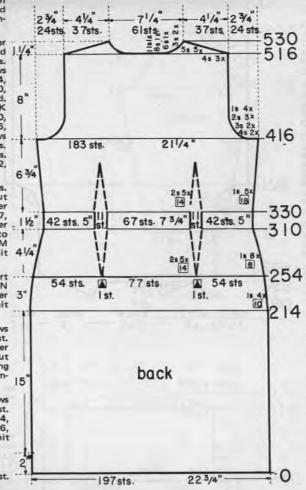

Move the Cam Box to the left side, turn the Row Counter back to 516 and complete the left half. Follow the instructions from *.

ON CAM BOX SIDE, bind off 4 sts. after Row 516 (EVEN ROWS = SHOUL-DER SHAPING); 11 sts. (10 sts. for the left half) after Row 517 (ODD ROWS = NECK SHAPING); 4 sts. after Row 518; 8 sts. after Row 519; 4 sts. after Row 520: 6 sts. after Row 521; 5 sts. after Row 522; 3 sts. after Row 523; 5 sts. after Row 524; 3 sts. after Row 525; 5 sts. after Rows 526, 528, 530.

ON CAM BOX SIDE, bind off 4 sts. after Rows 416, 417, 418, 419; 3 sts. after Rows 420, 421, 422, 423; 2 sts. after Rows 424, 425, 426, 427, 428, 429; 1 st. after Rows 430, 431, 432, 433, 434, 435, 436, 437. Now knit to Row 516, put the 67 needles on the left side into holding position and complete the right half first.

Increase 2 sts. for each Dart after Rows in (). ON EACH SIDE, increase 1 st. after Rows 330, (330), (344), 348, (358), 366, (372), 384, (386), 402, then knit to Row 416.

Decrease 2 sts. for each Dart after Rows in (), ON EACH SIDE, decrease 1 st. after Rows 214, 224, 234, 244, 254, (254), 262, (268), 270, 278, (282), 286, 294, (296), 302, 310, (310), then knit even to Row 330.

ROWS 0 to 214: Knit even.


Cast on 197 sts. and work stockinette st. If needed, alter length at this point,

DP 7859


SIZE: 16/18. MATERIAL: 15% oz. (9 balls) yellow KNITKING Subita Dralon 3 ply, Color No. 441. TENSION: KNITKING 4 to 6. STITCH GAUGE: 15 sts. 2", 22 rows 2". PATTERN: Stockinette Stitch with 3 Cable Design Stripes on the front section according to Line Drawing, COLLAR, SLEEVE EDGES, BELT and LOOPS: K1, P1, Ribbing, INCREASES on SLEEVES: After rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st, from the row below onto the empty needle, Bind off the ribbed sections the crochet method for ribbing,

FINISHING: Block all sections to measurements given. Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 14 rows on lower edge and hem to wrong side, Join short ends of collar, Sew 1 edge of collar to inside and 1 edge to outside of neckline. Sew belt-loops to pullover, (see picture).






The Cable Design is worked over 13 needles. 1. Let the 1st, 2nd, 12th and 13th sts. slide off the needles. 2. With 2 double transfer tools, hang the 5th and 6th sts. onto the 3rd and 4th needles, then the 3rd and 4th sts. onto the 5th and 6th needles, 3, Hang the 8th and 9th sts, onto the 10th and 11th needles, then the 10th and 11th sts. onto the 8th and 9th needles. Bring the empty needles back into working position. Cross the sts, the first time after Row 4, then again after every 8th row. After each 30 to 40 rows let the 1st, 2nd, 12th and 13th sts. slide off the needles, then latch up into knit sts.



Cast on 164 sts, and work 48 rows K1. P1, Ribbing, then bind off all sts.

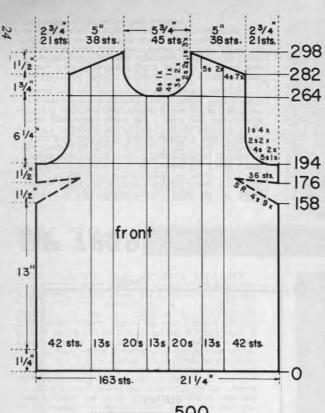

Move the Cam Box to the left side, turn the Row Counter back to 264 and complete the left half. Follow the instructions from *.


* ON CAM BOX SIDE, bind off 6 sts. (5 sts. for the left half) after Row 265 (ODD ROWS = NECK SHAPING); 4 sts. after Row 267; 3 sts. after Rows 269, 271; 2 sts. after Rows 273, 275; 1 st. after Rows 277, 279, 281; then for SHOULDER, 4 sts. after Rows 282, 284, 286, 288, 290, 292, 294; 5 sts. after Rows 296, 298.

ON CAM BOX SIDE, bind off 5 sts. after Rows 194, 195; 4 sts. after Rows 196, 197, 198, 199; 2 sts. after Rows 200, 201, 202, 203; 1 st. after Rows 204, 205, 206, 207, 208. 209, 210, 211. Now knit even to Row 264, then put 60 needles on the left side into holding position and complete the right half first.

For the Bust Darts work Short Rows. ON OPPOSITE SIDE of CAM BOX put into holding position 4 needles after Rows 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175. ON OPPOSITE SIDE of CAM BOX bring all needles back into working position after Rows 176, 177, then knit to Row 194.

ROWS 0 to 158: Knit even.

Cast on 163 sts. and work the Cable Design Stripes over the sts. marked on the diagram.




ON CAM BOX SIDE, bind off 4 sts. after Rows 180, 181; 3 sts. after Rows 182, 183, 184, 185, 186, 187; 2 sts. after Rows 188, 189, 190, 191, 192, 193, 194, 195. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230. ON CAM BOX SIDE, bind off 2 sts. after Rows 234, 235; 6 sts. after Rows 236, 237; 12 sts. after Row 238.


ON EACH SIDE, increase 1 st. after Rows 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 124, 130, 136, 142, 148, 154, 160, 166, 172, then knit to Row 180.

ROWS 0 to 30: Knit even, then change to stockinette st.


Cast on 72 sts. and work K1, P1, Ribbing.



Cast on 17 sts. and work 500 rows K1, P1, Ribbing, then bind off all sts.



Cast on 13 sts. and work 24 rows K1, P1, Ribbing, then bind off all sts.

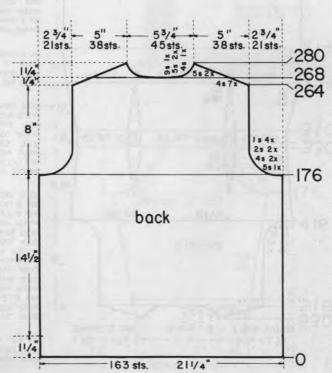

Move the Cam Box to the left side, turn the Row Counter back to 268 and complete the left half, Follow the instructions from *.

* ON CAM BOX SIDE, bind off 4 sts. after Row 268 (EVEN ROWS = SHOUL-DER SHAPING); 9 sts. (8 sts. for the left half) after Row 269 (ODD ROWS = NECK SHAPING); 4 sts. after Row 270; 5 sts. after Row 271; 4 sts. after Row 272; 5 sts. after Row 273; 4 sts. after Rows 274, 275, 276; 5 sts. after Rows 278, 280.

ON CAM BOX SIDE, bind off 4 sts. after Rows 264, 265, 266, 267. After Row 268 put 52 needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 5 sts. after Rows 176, 177; 4 sts. after Rows 178, 179, 180, 181; 2 sts. after Rows 182, 183, 184, 185; 1 st. after Rows 186, 187, 188, 189, 190, 191, 192, 193, then knit even to Row 264.

ROWS 0 to 176: Knit even.


Cast on 163 sts, and work stockinette st.

MK 5228


SITICH GAUGE: 15 sts. 2". 22 rows 2". PAT-TERN: Stockinette Stitch with 3 Cable Design Stripes on the front section according to Line Drawing DP 7859. COLLAR, Sleeve EDGES, BELT and BELT-LOOPS: K1, P1, Ribbing. DE-CREASES on DRESS SIDE SEAMS: After Rows indicated, hang the 3rd st. ON EACH SIDE onto the 2nd st., then move the end sts. inward to fill the empty needle, INCREASES on SLEEVES: After Rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st, from the row below onto the empty needle, Bind off all ribbed sections the crochet method for ribbing, Finished length of the Dress is 27". To shorten, after Row 44, turn Row Counter ahead up to 22 rows. To lengthen, after Row 44, turn Row Counter back as many rows as are needed. (See Stitch Gauge),

FINISHING: Block all section to measurements given. Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 22 rows on lower edge and hem to wrong side. Join short ends of collar. Sew 1 edge of collar to inside and 1 edge to outside of neckline. Sew belt-loops to dress, (see picture).





Cast on 13 sts. and work 280 rows K1, P1, Ribbing, then bind off all sts.




ON CAM BOX SIDE, bind off 4 sts. after Rows 156, 157; 3 sts. after Rows 158, 159; 2 sts. after Rows 160, 161, 162, 163, 164, 165; 1 st. after Rows 166, 167, 168, 169, 170, 171; 2 sts. after Rows 172, 173; 1 st. after Rows 174, 175, 176, 177, 178, 179; 2 sts. after Rows 180, 181; 1 st. after Rows 182, 183, 184, 185, 186, 187; 2 sts. after Rows 188, 189; 1 st. after Rows 190, 191, 192, 193, 194, 195; 2 sts. after Rows 196, 197, 198, 199; 3 sts. after Rows 200, 201, 202, 203; 9 sts. after Rows 204.


ON EACH SIDE, increase 1 st. after Rows 24, 30, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, then knit to Row 156.

ROWS 0 to 24: Knit even, then change to stockinette st.


Cast on 57 sts. and work K1, P1, Ribbing.



Cast on 13 sts. and work 16 rows K1, P1, Ribbing, then bind off all sts.



Cast on 136 sts. and work 48 rows K1, P1, Ribbing, then bind off all sts.

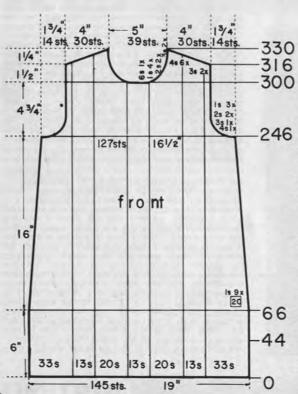

Move the Cam Box to the left side, turn the Row Counter back to 300 and complete the left half. Follow the instructions from *.


* ON CAM BOX SIDE, bind off 6 sts. (5 sts. for the left half) after Row 301 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 303, 305; 2 sts. after Rows 307, 309; 1 st. after Rows 311, 313, 315; 3 sts. after Row 316 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 317 (last time for Neck); 3 sts. after Row 318; 4 sts. after Rows 320, 322, 324, 326, 328, 330.

ON CAM BOX SIDE, bind off 4 sts. after Rows 246, 247; 3 sts. after Rows 248, 249; 2 sts. after Rows 250, 251, 252, 253; 1 st. after Rows 254, 255, 256, 257, 258, 259. Now knit even to Row 300, then put 49 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, decrease 1 st. after Rows 66, 86, 106, 126, 146, 166, 186, 206, 226, then knit even to Row 246.

ROWS 0 to 66: Knit even, or alter length after Row 44.

Cast on 145 sts. and work the Cable Design Stripes over the sts. marked on the diagram.

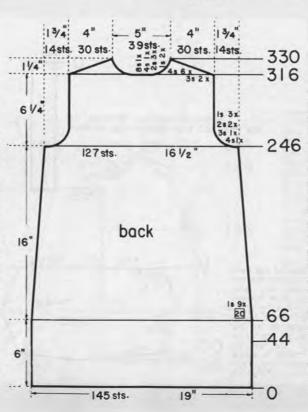

Move the Cam Box to the left side, turn the Row Counter back to 316 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 3 sts. after Row 316 (EVEN ROWS = SHOUL-DER SHAPING); 8 sts. (7 sts. for the left half) after Row 317 (ODD ROWS = NECK SHAPING); 3 sts. after Row 318; 4 sts. after Rows 319, 320; 2 sts. after Row 321; 4 sts. after Row 322; 2 sts. after Row 323; 4 sts. after Row 324; 2 sts. after Row 325; 4 sts. after Row 326; 1 st. after Row 327; 4 sts. after Row 328; 1 st. after Row 329; 4 sts. after Row 328; 1 st. after Row 329; 4 sts. after Row 330.

ON CAM BOX SIDE, bind off 4 sts. after Rows 246, 247; 3 sts. after Rows 248, 249; 2 sts. after Rows 250, 251, 252, 253; 1 st. after Rows 254, 255, 256, 257, 258, 259. Now knit to Row 316, then put 49 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, decrease 1 st. after Rows 66, 86, 106, 126, 146, 166, 186, 206, 226, then knit to Row 246.


ROWS 0 to 66: Knit even, or alter length after Row 44.


Cast on 145 sts. and work stockinette st.


SIZE: 20/22, (Bust 42"-44"), MATERIAL: 28 oz. (16 balls) teal blue and 1% oz. (1 ball) turquoise KNITKING Subita Crepe 2 x 3, Color Nos. 130 and 145, TENSION: KNITKING 3 to 5, STITCH GAUGE: 17 sts. 2". 25 rows 2". PATTERN: Stockinette Stitch, BELT: K1, P1, Ribbing, Make ALL shapings of 1 st, Full-fashion, DECREASES: After rows indicated, hang the 3rd st. on the appropriate sides onto the 2nd st., then move the end sts, inward to fill the empty needle, IN-CREASES: After rows indicated, move the 2 end sts. on the appropriate sides 1 needle outward. then place the 3rd st, from the row below onto the empty needle. Begin the DART (Skirt) by hanging the sts. marked on the diagram together, then move the end sts. inward to fill the empty needles. The following decreases for the dart lie directly above. The finished length of the Skirt, including the Waist-band is 24%". To alter the length, see Practical Hint.


FINISHING: Block all sections to measurements given. SKIRT: Weave all sections together, 1 st, in on each edge, leaving an opening on the left side seam for the zipper. Make a narrow hem around the opening. Turn under 25 rows on lower edge and 13 rows on upper edge and hem to wrong side, Insert an elastic band into upper hem, Sew in zipper, then line the skirt, JACKET: Join front and back sections at sides and shoulders. Sew sleeves together and set in. Turn under 15 rows on lower edge and sleeve edges and hem to wrong side, Turn under Facing allowance on front edges (10 sts. beginning at lower edge, then straight up) and hem to wrong side. Weave front bands to fold line. leaving 5 openings for the buttonholes on the right section. The first buttonhole begins 3" from the lower edge and is about 1/2" long. The following buttonholes are about 2%" apart. Turn under half of bands and hem against seam line on wrong side. Fold collar in half lengthwise and sew 2" on short ends together. Sew 1 edge of collar to inside and 1 edge to outside of neckline and sew 2" of side edges of collar to front sections, Finish buttonholes, sew on buttons. Knit a length of round cord over 4 needles for the belt loop. Sew snaps to belt, then cover with the loop.












ON CAM BOX SIDE, bind off 6 sts. after Rows 70, 71; 4 sts. after Rows 72, 73, 74, 75; 3 sts. after Rows 76, 77, 78, 79; 2 st. after Rows 80, 81, 82, 83. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132. ON CAM BOX SIDE, bind off 2 sts. after Rows 134, 135; 4 sts. after Rows 136, 137; 5 sts. after Rows 138, 139; 13 sts. after Rows 140.

ON EACH SIDE, Decrease 1'st. after Rows 4, 8, 12, then Increase 1 st. after Rows 18, 22, 26, 30, 38, 46, 54, 62. Knit even to Row 70.

Cast on 123 sts, and work stockinette st.



Cast on 116 sts. and work stockinette st. ON EACH SIDE, Increase 1 st. after Rows 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, then Decrease 1 st. after Rows 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96. Knit to Row 100, then work Short Rows. ON OPPOSITE SIDE of CAM BOX put into holding position 14 needles after Rows 100, 101, 102, 103, 104, 105. After Row 106 bring all needles back into working position and bind off all 116 sts. the crochet method.

Work the left front section with reverse shapings, casting on from right to left. (The Cam Box will be on the LEFT SIDE at Row 0).

ON CAM BOX SIDE, Increase 1 st. after Row 291 AND continue to Increase 1 st. ON CAM BOX SIDE after Rows in (). ON NECK SIDE, Decrease 1 st. after Rows 293, 296, 299, (299), 302, 305, (307), 308, 311, 314, (315), 317, 320, 323, (323). ON CAM BOX SIDE, bind off 3 sts. for SHOULDER after Row 325. Decrease 1 more st. ON NECK SIDE after Row 326, then bind off for Shoulder, 3 sts. after Row 327 and 4 sts. after Row 329.

Bring the FACING STITCHES back into working position, turn the Row Counter back to 290 and complete the Facing. (The Cam Box is on the NECK SIDE of the Facing).

ON NECK SIDE decrease 1 st. after Rows 293, 296, 299, 302, 305, 308, then decrease 1 st. ON NECK SIDE after Rows in (). ON CAM BOX SIDE, bind off 4 sts. for SHOULDER after Rows 310, (311), 312, 314, (314), 316, (317), 318, 320, (320), 322; (323), 5 sts. after Rows 324, 326, (326), 328, 330.

ON CAM BOX SIDE, bind off 7 sts. after Row 204; 6 sts. after Row 206; 5 sts. after Row 206; 5 sts. after Row 210; (211), 2 sts. after Rows 212, 214; 1 st. after Rows 216, 218. The Armhole is now completed. Continue to Increase 1 st. for the Facing after Rows 219, 227, 235, 243, 251, 259, 267, 275, 283. Now knit to Row 290, then bind off 20 sts. beginning with the 61st st. counting from the CAM BOX SIDE, put the Facing sts. into holding position and complete right side (left side for second section) first.


For the Bust Dart work Short Rows. ON OPPOSITE SIDE of CAM BOX, put into holding position 4 needles after Rows 161, 163, (163), 165, 167, 169, 171, (171), 173, 175, 177, 179, (179). After Row 181 bring all needles back into working position and continue to Increase 1 st. after Rows (187), (195), (203), then knit to Row 204.

ON CAM BOX SIDE, Increase 1 st. for the FACING after Row 155, then continue to Increase 1 st. for the Facing after Rows in (). Knit to Row 161.

ROWS 16 to 155: Knit even.

ROWS 0 to 15: Knit even, then cast on 20 sts. ON CAM BOX SIDE,

Cast on 87 etc and work etackinatta et






Work 3 more sections the same.

Decrease 1 st. ON EACH SIDE and 2 sts. for the DART after Rows 250, 264, 278, 292, 306, 320, then knit even to Row 346 and bind off the remaining 83 sts.

ON EACH SIDE, decrease 1 st. after Rows 76, 92, 108, 124, 140, 156, 172, 188, 204, 220, 236, then knit to Row 250.

ROWS 0 to 76: Knit even.

Cast on 129 sts. and work stockinette st.



Move the Cam Box to the left side, turn the Row Counter back to 300 and complete the left half. Follow the instructions from*.

* ON CAM BOX SIDE, bind off 4 sts. after Row 300 (EVEN ROWS = SHOUL-DER SHAPING); 8 sts. after Row 301 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 302, 303; 5 sts. after Row 304; 4 sts. after Row 305; 5 sts. after Row 306; 3 sts. after Row 307; 5 sts. after Row 308; 3 sts. after Row 309; 5 sts. after Row 309; 5 sts. after Row 310.

ON CAM BOX SIDE, bind off 4 sts. after Rows 290, 291, 292, 293, 294, 295, 296, 297, 298, 299. Now knit to Row 300, then put 50 needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 7 sts. after Rows 184, 185; 6 sts. after Rows 186, 187; 5 sts. after Rows 188, 189; 3 sts. after Rows 190, 191; 2 sts. after Rows 192, 193, 194, 195; 1 st. after Rows 196, 197, 198, 199, then knit to Row 290.

ROWS 0 to 184: Knit even.


Cast on 194 sts. and work stockinette st.

KK 5222


SIZE: 12-13, (Chest 30"-31"). MATERIAL: 12% oz. (7 balls) tan KNITKING Subita Crepe 2 x 3, Color No. 133 and a 20" Jacket Type Zipper. TENSION: KNITKING 4 to 6. STITCH GAUGE: Stockinette Stitch 17 sts. 2", 23 rows 2"; Ribbing 17 sts. 2", 27 rows 2". PATTERN: Stockinette Stitch. EDGES: K1, P1, Ribbing, Make the increases on the sleeves Full-fashion. After rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st. from the row below onto the empty needle.

FINISHING: Block all sections to measurements given. Join front and back sections at sides and shoulders. Sew sleeves together and set in. Sew on pockets. Turn under 3 sts. on front edges and hem to wrong side, Sew 1 edge of collar to inside and 1 edge to outside of neckline. Set in zipper.






Cast on 145 sts. and work 64 rows K1, P1, Ribbing, then bind off all sts. the crochet method for ribbing.



Cast on 35 sts. and work 36 rows stockinette st., then transfer every other st. to the ribber and work 10 rows K1, P1, Ribbing. After Row 46 bind off all sts. the crochet method for ribbing.



Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT SIDE at Row 0).


ON CAM BOX SIDE, bind off 8 sts, after Row 215 (DDD ROWS = NECK SHAPING); 3 sts, after Rows 217, 219; 2 sts. after Rows 221, 223, 225; 1 st. after Row 227; 4 sts. after Row 228 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 229; 4 sts. Row 230; 1 st. after Row 231; 4 sts. after Row 232; 1 st. after Row 233; 4 sts. after Rows 234, 236, 238; 5 sts. after Rows 240, 242.

ON CAM BOX SIDE, bind off 5 sts, after Row 146; 3 sts. after Rows 148, 150; 2 sts. after Rows 152, 154; 1 st. after Rows 156, 158, then knit even to Row 215.

ROWS 55 to 146: Knit even.

ROWS 0 to 54: Knit even, then change to stockinette st.

Cast on 75 sts. and work K1, P1, Ribbing,




Move the Cam Box to the left side, turn the Row Counter back to 228 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 4 sts. after Row 228 (EVEN ROWS = SHOUL-DER SHAPING); 7 sts. (6 sts. for the left half) after Row 229 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 230, 231, 232; 3 sts. after Row 233; 4 sts. after Row 234; 3 sts. after Row 235; 4 sts. after Row 236; 2 sts. after Row 237; 4 sts. after Row 238; 2 sts. after Row 239; 5 sts. after Row 240, 242.

ON CAM BOX SIDE, bind off 5 sts. after Rows 146, 147; 3 sts. after Rows 148, 149, 150, 151; 2 sts. after Rows 152, 153, 154, 155; 1 st. after Rows 156, 157, 158, 159. Now knit even to Row 228, then put 54 needles on the left side into holding position and complete the right half first.

ROWS 55 to 146: Knit even, then change to stockinette st.

Cast on 143 sts. and work K1, P1, Ribbing.



230 ON CAM BOX SIDE, bind off 5 sts. after Rows 180, 181; 4 sts. after Rows 182, 183; 3 sts. after Rows 184, 185, 186, 187; 2 sts. after Rows 188, 189, 190, 191; 1 st. after Rows 192, 193, 194, 195; 2 sts. after Rows 196, 197; 1 st. after Rows 198, 199, 200, 201; 2 sts. after Rows 202, 203; 1 st. after Rows 204, 205, 206, 207; 2 sts. after Rows 208, 209; 1 st. after Rows 210, 211, 212, 213; 2 sts. after Rows 214, 215; 1 st. after Rows 216, 217, 218, 219; 2 sts. after Rows 220, 221, 222, 223, 224, 225; 3 sts. after Rows 230.

ON EACH SIDE, increase 1 st. after Rows 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 174, then knit to Row 180.

ROWS 0 to 32: Knit even, then change to stockinette st.


Cast on 71 sts. and work K1, P1, Ribbing.

MK 5221

SIZE: 11/12 Jr. (Bust 32"), MATERIAL: 14 oz. (8 balls) blue KNITKING Subita Crepe 2 x 3, Color No. 137 and a 22" white and blue striped Jacket Type Zipper, Tension: KNITKING 4 to 6. STITCH GAUGE: 17 sts. 2", 23 rows 2". PATTERN: Stockinette Stitch. POCKET EDGES: K1, P1, Ribbing, DECREASES for SIDE SEAMS: After Rows indicated, hang the 4th st, on the appropriate sides onto the 3rd st, then move the end sts. inward to fill the empty needle. DECREASES for FRONT NECKLINE: After Rows indicated, hang the 8th st. ON NECK SIDE onto the 7th st., then move the end sts, inward to fill the empty needle, The finished length of the Jumper is 301/2". To shorten, after row 46, set the Row Counter ahead up to 24 rows. To lengthen, after Row 46, turn Row counter back as many rows as are needed, (See Stitch Gauge).

FINISHING: Block the sections to measurements given. Turn under 3 sts. on all front edges and hem to wrong side. With right sides together, sew facing to back section, then turn to wrong side. Join front and back sections at sides and shoulders. Turn under 2" at lower edge and hem to wrong side. Sew back facing in place. Leaving the Zipper Tape visible, sew zipper to foldline of front edges. (See picture).






Cast on 55 sts. and work 5 rows stockinette st., then bind off all sts.

56 pocket 4" pocket 4" make 2 47sts. 51/2" 0

Cast on 47 sts. and work 46 rows stockinette st., then transfer every other st. to the Ribber and work 10 rows K1, P1, Ribbing. After Row 56 bind off all sts. the crochet method for ribbing.



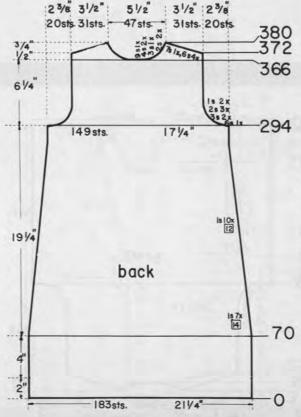

Move the Cam Box to the left side, turn the Row Counter back to 366 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 9 sts. (8 sts. for the left half) after Row 367 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 369, 371; 6 sts. after Row 372 (EVEN ROWS = SHOULDER SHAPING); 3 sts. after Row 373; 6 sts. after Row 374; 2 sts. after Row 375; 6 sts. after Row 376; 2 sts. after Row 377; 6 sts. after Row 376; 7 sts. after Row 380.

ON CAM BOX SIDE, bind off 6 sts. after Rows 294, 295; 3 sts. after Rows 296, 297, 298, 299; 2 sts. after Rows 300, 301, 302, 303, 304, 305; 1 st. after Rows 306, 307, 308, 309. Now knit even to Row 366, then put 54 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, decrease 1 st. after Rows 70, 84, 98, 112, 126, 140, 154, 168, 180, 192, 204, 216, 228, 240, 252, 264, 276, then knit even to Row 294.

ROWS 0 to 70: Knit even.

Cast on 183 sts. and work stockinette st.


HP 3602

SIZE: 42/44. MATERIAL: 26½ oz. (15 balls) gray KNITKING Nora, Color No. 4004. TENSION: KNITKING 7 to 9. STITCH GAUGE: 14 sts. 2″, 19 rows 22″. PATTERN: Holding Position Design with omitted needles according to Line Drawing. The omitted sts. are counted as sts. in the stitch gauge and instructions. SLEEVE INCREASES: After Rows indicated, move the 2 end sts. ON EACH SIDE 1 needle outward, then place the 3rd st. from the row below onto the empty needle, (KEEP IN PATTERN). FRONT SHAPING: After Rows indicated, hang the 24th st. ON NECK SIDE onto the 23rd st., then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections to measurements given. Join front and back sections at sides and shoulders. Sew sleeves together and set in. Weave facing together. Turn under facing on fronts and neckline and hem to wrong side. Finish buttonholes, sew on buttons. Sew on pockets.





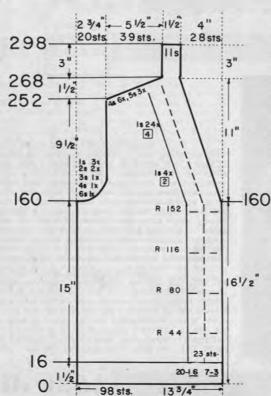


Work the right front section with reverse shapings, casting on from left to right. (Cam Box will be on the RIGHT SIDE at Row 0). Omit the buttonholes.

Decrease 1 st. ON NECK SIDE after Rows in (). ON CAM BOX SIDE, bind off 6 sts. after Row 160; (160), 4 sts. after Row 162; (162), 3 sts. after Row 164; (164), 2 sts. after Rows 166, (166), 168; (168), 1 st. after Rows 170, 172, (172), 174. The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 176, 180, 184, 188, 192, 196, 200, 204, 208, 212, 216, 220, 224, 228, 232, 236, 240, 244, 248. continue to decrease 1 st. ON NECK SIDE after Rows in (). For SHOUL-DER bind off 4 sts. after Rows 252, (252), 254, 256, (256), 258, 260 (260 last time 'for Neck), 262; 5 sts. after Rows 264, 266, 268. Knit even over the remaining 11 sts. to Row 298, then put the sts, on a stitch holder.

ROWS 16 to 160: Make buttonholes after Rows 44, 80, 116, 152.

ROWS 0 to 16: Make buttonholes after Row 8 over the 3rd-7th and 16th-20th sts. Counting from OPPOSITE SIDE of CAM BOX. After Row 16 transfer the ribber sts. to the main machine, set up for PATTERN and work the Holding Position Design. (Counting from CAM BOX SIDE, transfer first the 25th, then every following 16th st. to the neighboring needles). The Band Section is worked without the Pattern Stripe.

From right to left, cast on 98 sts. and work K1, P1, Ribbing. (The Cam Box will be on the LEFT SIDE at Row 0).

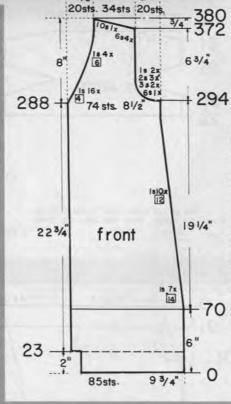

Work the second front section with reverse shapings, casting on from right to left (Cam Box will be on the LEFT SIDE at Row 0).


Decrease 1 st. ON NECK SIDE after Rows in (). ON CAM BOX SIDE, bind off 6 sts. after Row 294; 3 sts. after Rows 296, (296), 298; 2 sts. after Rows 300, (300), 302, 304; (304), 1 st. after Rows 306, 308, (308). The Armhole is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 312, 316, 320, 324, 328, 332, 336, 340, 344, 348, 352, 358, 364, 370. For SHOULDER bind off 6 sts. after Rows 372, 374, 376, 378; 10 sts. after Row 380,

ON CAM BOX SIDE, decrease 1 st. after Rows 70, 84, 98, 112, 126, 140, 154, 168, 180, 192, 204, 216, 228, 240, 252, 264, 276, then knit to Row 288. ON NECK SIDE, decrease 1 st. after Rows 288, 292, then knit to Row 294.

ROWS 24 to 70: Knit even.

ROWS 0 to 23: Knit even, then cast on 6 sts. ON CAM BOX SIDE.

Cast on 85 sts. and work stockinette st.



ON CAM BOX SIDE, bind off 4 sts. after Rows 176, 177, 178, 179; 3 sts. after Rows 180, 181, 182, 183; 2 sts. after Rows 184, 185, 186, 187, 188, 189; 1 st. after Rows 190, 191, 192, 193; 2 sts. after Rows 194, 195; 1 st. after Rows 196, 197, 198, 199; 2 sts. after Rows 200, 201; 1 st. after Rows 202, 203, 204, 205; 2 sts. after Rows 206, 207; 1 st. after Rows 208, 209, 210, 211; 2 sts. after Rows 212, 213; 1 st. after Rows 214, 215, 216, 217; 2 sts. after Rows 214, 215; 1 st. after Rows 220, 221, 222, 223; 2 sts. after Rows 224, 225; 4 sts. after Rows 226, 227; 6 sts. after Rows 230.

ON EACH SIDE, increase 1 st. after Rows 20, 28, 36, 44, 52, 60, 68, 74, 80, 86, 92, 98, 104, 110, 116, 122, 128, 134, 140, 146, 152, 158, 164, 170, then knit to Row 176.

ROWS 0 to 20: Knit even, then transfer the ribber sts, to the main machine, set up for PATTERN and continue in Holding Position Design.

Cast on 73 sts. and work K1, P1, Ribbing.

(Continued on next page)


SIZE: 42/44. MATERIAL: 22% oz. (13 balls) KNITKING Linen-Cotton, No. 7105. TENSION: KNITKING 3 to 5. STITCH GAUGE: 17 sts. 2", 23 rows 2". PATTERN: Stockinette Stitch, worn on the purl side. Make the Increases on the Sleeves and Front Facing Full-fashion. After Rows indicated, move the 2 end sts. on the appropriate sides 1 needle outward, then place the 3rd st. from the row below onto the empty needle.

FINISHING: Block all sections to measurements given. Join front and back sections at sides and shoulders. Sew sleeves together and set in. Turn under 19 rows on lower edge and 18 rows on sleeve edges and hem to wrong side, Turn under Facing Allowance at front edges, (20 sts. at lower edges, then straight up) and hem to wrong side. Turn under 14 rows on upper pocket edges, hem to wrong side, then sew pockets to jacket as illustrated. Fold collar in half lengthwise and sew short ends. Sew 1 edge of collar to inside and 1 edge to outside of neckline, leaving 2" for the lapels free. Finish buttonholes, sew on buttons.





Cast on 51 sts, and work 74 rows stockinette st., then bind off all sts.




ON CAM BOX SIDE, bind off 7 sts. after Rows 234, 235; 4 sts. after Rows 236, 237, 238, 239; 3 sts. after Rows 240, 241, 242, 243; 2 sts. after Rows 244, 245, 246, 247; 1 st. after Rows 248, 249, 250, 251; 2 sts. after Rows 252, 253; 1 st. after Rows 254, 255, 256, 257; 2 sts. after Rows 258, 259; 1 st. after Rows 260, 261, 262, 263; 2 sts. after Rows 264, 265; 1 st. after Rows 266, 267, 268, 269; 2 sts. after Rows 270, 271; 1 st. after Rows 272, 273, 274, 275; 2 sts. after Rows 276, 277; 1 st, after Rows 278, 279, 280, 281; 2 sts. after Rows 282, 283; 1 st. after Rows 284, 285, 286, 287; 2 sts. after Rows 288, 289, 290, 291; 3 sts. after Rows 292, 293, 294, 295; 6 sts. after Rows 296, 297; 13 sts. after Row 298.

ON EACH SIDE, increase 1 st. after Rows 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 180, 188, 196, 204, 210, 216, 222, 228, then knit to Row 234.

ROWS 0 to 36: Knit even.

Cast on 95 sts. and work stockinette st.

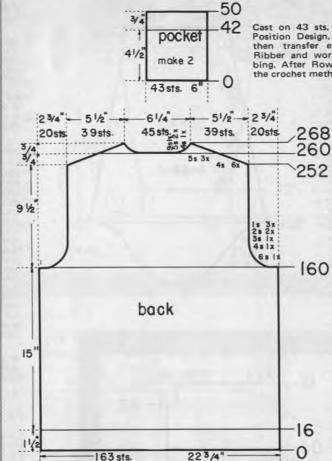

Cast on 43 sts. and work the Holding Position Design, Knit even to Row 42, then transfer every other st. to the Ribber and work 8 rows K1, P1, Ribbing, After Row 50 bind off all 43 sts. the crochet method for ribbing.

Move the Cam Box to the left side, turn the Row Counter back to 260 and complete the left half. Follow the instructions from*.

* ON CAM BOX SIDE, bind off 4 sts. after Rows 260 (EVEN ROWS = SHOULDER SHAPING); 9 sts. (8 sts. for the left half) after Row 261 (ODD ROWS = NECK SHAPING); 4 sts. after Row 262; 5 sts. after Rows 263, 264, 265, 266; 4 sts. after Row 267; 5 sts. after Row 268.


ON CAM BOX SIDE, bind off 4 sts. after Rows 252, 253, 254, 255, 256, 257, 258, 259. After Row 260 put 45 needles on the left side into holding position and complete the right half first.


ON CAM BOX SIDE, bind off 6 sts. after Rows 160, 161; 4 sts. after Rows 162, 163; 3 sts. after Rows 164, 165; 2 sts. after Rows 166, 167, 168, 169; 1 st. after Rows 170, 171, 172, 173, 174, 175, then knit even to Row 252.

ROWS 17 to 160: Knit even.

ROWS 0 to 16: Knit even, then transfer the ribber sts. to the main machine, set up for PATTERN and continue in Holding Position Design.


Cast on 163 sts. and work K1, P1, Ribbing.





ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, then knit to Row 52. ON OPPOSITE SIDE of CAM BOX bring back into working position 5 needles after Rows 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, (all needles are now back in working position). Knit even to Row 92, then bind off all 143 sts.

Cast on 143 sts. and work Short Rows. ON OPPOSITE SIDE of CAM BOX put into holding position 40 needles after Rows 0, 1. ON OPPOSITE SIDE of CAM BOX, bring back into working position 8 needles after Rows 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, (all needles are now back in working position). Knit even to Row 36.

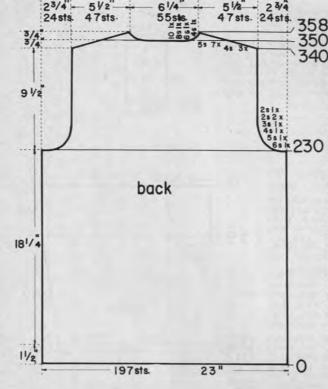

Move the Cam Box to the left side, turn the Row Counter back to 350 and complete the left half, Follow the instructions from *.

* ON CAM BOX SIDE, bind off 5 sts. after Row 350 (EVEN ROWS = SHOUL-DER SHAPING); 10 sts. (9 sts. for the left half) after Row 351 (ODD ROWS = NECK SHAPING); 5 sts. after Row 352; 8 sts. after Row 353; 5 sts. after Row 354: 6 sts. after Row 355: 5 sts. after Row 356; 4 sts. after Row 357; 5 sts. after Row 358.

ON CAM BOX SIDE, bind off 4 sts. after Rows 340, 341, 342, 343, 344, 345; 5 sts. after Rows 346, 347, 348, 349. Now knit to Row 350, put 52 355 needles on the left side into holding position and complete the right half

ON CAM BOX SIDE, bind off 6 sts. after Rows 230, 231; 5 sts. after Rows 232, 233; 4 sts. after Rows 234, 235; 3 sts. after Rows 236, 237; 2 sts. after Rows 238, 239, 240, 241; 1 st. after Rows 242, 243, 244, 245, then knit to Row 340.

ROWS 0 to 230: Knit even.


Cast on 197 sts. and work stockinette st.

MK 5212

SIZE: 4-5, (Chest 23"-24"), MATERIAL: 7 oz. (4 balls) blue and a small amount of white KNIT-KING Subita Dralon 2 ply, Color Nos. 406 and 401. TENSION: KNITKING 2 to 4. STITCH GAUGE: 18 sts. 2", 27 rows 2". PATTERN: Stockinette Stitch. SLEEVE EDGES and POCKET EDGES: K1, P1, Ribbing. Make decreases on sides of dress Full-fashion. After rows indicated, hang the 3rd st. ON EACH SIDE onto the 2nd st., then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections to measurements given. Join front and back section at sides and shoulders. Sew sleeves together and set in. Turn under 2" on lower edge and hem to wrong side. Weave 1 edge of buttonhole band to right side of front opening, fold under, matching buttonholes and sew against seam line. Weave button band to left side in the same manner, Fold collar in half lengthwise and sew short ends. Sew 1 edge of collar to inside and 1 edge to outside of neckline, leaving about %" of the bands free. Finish buttonholes, sew on buttons. Sew on pockets. (See picture).





51/2-

47sts-

67sts.

23/4

24sts

1s 2 x 2s 2x 3s 1x

21/2

312

81/2

75 sts-

1s 20x

2

__240

35 sts.

1/4-

133/4

10 sts.

COLIG TIOTIL SECTION WITH THE verse shapings, casting on from right to left, (Cam Box will be on the LEFT SIDE at Row 0). Omit the buttonholes.

Bring the Facing sts. back into working position, turn the Row Counter back to 312. (CAM BOX will be on the NECK SIDE of the Facing). ON CAM BOX SIDE, Increase 1 st. for the facing after Row 313, then continue to Increase 1 st. after Rows in (). ON NECK SIDE, Decrease 1 st. after Rows 314, 316, 318, (319), 320, 322, 324, (325), 326, 328, 330, (331), 332, 334, 336, (337), 338, 340, 342, (343), 344, 346, 348, (349), 350, 352. ON CAM BOX SIDE, bind off 3 sts. for SHOULDER after Rows 355, 357; 4 sts. after Row 359.

ON NECK SIDE, decrease 1 st, after Rows 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, then decrease 1 st. ON NECK SIDE after Rows in (), Knit to Row 340, ON CAM BOX SIDE, bind off for Shoulder 358 4 sts. after Rows 340, (340), 342, (342), 344; (344), 5 sts. after Rows 346, (346), 348, (348), 350, (350), 352, (352, last time for Neck) 354, 356, 358.


> ON CAM BOX SIDE, bind off 6 sts. after Row 230; 5 sts. after Row 232; 4 sts. after Row 234; (235), 3 sts. after Row 236; 2 sts. after Row 238. Make buttonholes after Row 240 above the previous buttonholes, then continue to bind off for Armhole 2 sts. after Row 240; (241), 1 st. after Rows 242, 244. The Armhole is now completed. Continue to Increase 1 st, for the Facing after Rows 247, 253, 259, 265, 271, 277, 283, 289, 295, 301, 307. Now knit to Row 312, then bind off 35 sts. for Neck, beginning with the 68th st. counting from the CAM BOX SIDE, put the Facing sts. into holding position and complete the right side (left side for second section) first.

ON CAM BOX SIDE, Increase 1 st. for the FACING after Rows 193, 199, 205, 211, 217, 223, 229, then increase 1 st. for the Facing after Rows in (). Knit to Row 230.


ROWS 20 to 193: Make buttonholes after Rows 75, 130, 185 over the 4th-11th and 31st-38th sts. counting from the left side.

ROWS 0 to 19: Knit even, then cast on 41 sts. ON CAM BOX SIDE.


Cast on 88 sts. and work stockinette st.



Cast on 25 sts. with blue and work K1, P1, Ribbing. Knit even to Row 6, then change to stockinette st., work 2 rows with white then change to blue, Knit even to Row 38 and bind off all sts.




Cast on 101 sts, with white and work 54 rows stockinette st., then bind off all sts.



ON CAM BOX SIDE, bind off 4 sts. after Rows 22, 23; 3 sts. after Rows 24, 25; 2 sts. after Rows 26, 27, 28, 29, 30, 31. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 32, 34, 36, 38, 40, 42, 44, 46, 48, 50. ON CAM BOX SIDE, bind off 2 sts. after Rows 52, 53, 54, 55; 3 sts. after Rows 56, 57, 58, 59; 10 sts. after Row 60.

ROWS 13 to 22: Knit 2 rows with white, then change to blue and knit even.

ROWS 0 to 12: Knit even, then change to stockinette st. and work with white. Cast on 76 sts. with blue and work K1, P1. Ribbing.

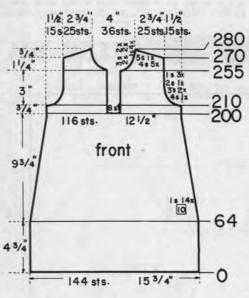

Move the Cam Box to the left side, turn the Row Counter back to 200 and complete the left half. Follow the instructions from *.

ON CAM BOX SIDE, bind off 3 sts. after Rows 255, 257 (ODD ROWS = NECK SHAPING); 2 sts. after Rows 259, 261; 1 st. after Rows 263, 265, 267, 269; 4 sts. for SHOULDER after Rows 270, 272, 274, 276, 278; 5 sts. after Row 280.

ON CAM BOX SIDE, bind off 4 sts. after Row 210; 3 sts. after Rows 212, 214; 2 sts. after Row 216; 1 st. after Rows 218, 220, 222, then knit even to Row 255.

* ROWS 201 to 210: Knit even.


ON EACH SIDE, decrease 1 st. after Rows 64, 74, 84, 94, 104, 114, 124, 134, 144, 154, 164, 174, 184, 194. Now knit to Row 200, then bind off the center 8 sts., put the 54 sts. on the left side into holding position and complete the right half first.

ROWS 0 to 64: Knit even.

Cast on 144 sts, and work stockinette st.



Cast on 20 sts. with white and work stockinette st. Make buttonholes after Rows 8, 22, 36, 50, over the 5th-7th and 14th-16th sts. After Row 54 bind off all sts. Work the button band the same, but omit the buttonholes.

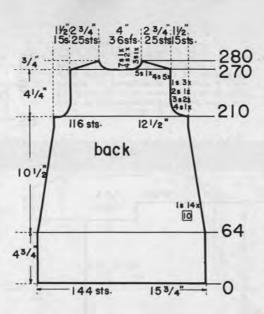

Move the Cam Box to the left side, turn the Row Counter back to 270 and complete the left half. Follow the instructions from *.

* ON CAM BOX SIDE, bind off 4 sts. after Row 270 (EVEN ROWS = SHOUL-DER SHAPING); 7 sts. after Row 271 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 272, 273, 274, 275, 276; 3 sts. after Row 277; 4 sts. after Row 278; 5 sts. after Row 280.

ON CAM BOX SIDE, bind off 4 sts. after Rows 210, 211; 3 sts. after Rows 212, 213, 214, 215; 2 sts. after Rows 216, 217; 1 st. after Rows 218, 219, 220, 221, 222, 223, then knit to Row 270, put 43 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, decrease 1 st. after Rows 64, 74, 84, 94, 104, 114, 124, 134, 144, 154, 164, 174, 184, 194, then knit to Row 210.

ROWS 0 to 64: Knit even.

Cast on 144 sts. and work stockinette st.

KG 1905

(Flower designs continued from page 16)

KNITKING Sonika Dralon: Use EVERY OTHER NEEDLE and Tension 8 to 10.

KNITKING Frigate: Use EVERY 3rd NEEDLE and Tension 9 or 10.

Cast on 31 sts. Put the 1st and every 6th needle into holding position and knit 8 (or 10) rows. The FIRST and LAST needle is ALWAYS a holding position needle and you must remember to bring the yarn under this needle so that it goes over it when knitting the next row. Put all needles into working position (KNIT-KING machines can push in left retractor button before knitting last row). Knit the first st. by hand and put this needle into holding position then knit 1 row slowly. Break yarn leaving a long end and tie this end to cast-on end up close against the end st. Thread end of

yarn into transfer needle (or tapestry needle) and take stitches off onto yarn. Pull up and tie. (KNITKING MACHINES, be sure to release sts. from under sinkers, put needles into holding position before removing sts.) Sew a flower to each side of hanger. You may make these in two colors if you wish, by casting on with one color, knitting the 8 to 10 rows, then change to a second color for the last row and take off the sts. onto the second color. Experiment... it's fun.

NOTE: Machines other than KNITKING may find it difficult to knit the single row over needles holding so many strands of yarn on the shanks of the needles and if you do, then knit this one row, one stitch at a time by hand, then take the sts. off on end of yarn after tying the ends.



KNITKING NEWS

March/April, 1970

IMPORTANT INFORMATION FOR READING KNITKING MAGAZINE CHARTS

The Charts for KNITKING MAGAZINE Patterns now show the increases and decreases for all shapings. The detailed numbers for darts, armhole, neck and shoulder as well as side shapings are shown on one side only (the right side) and of course you will know when looking at the outline of the Charts, that you must make the identical shapings on the left side of the garment section when the Chart outlines are the same on both sides. If the chart outline goes in, you will decrease and if it goes out, you will increase. Beginners will want to use the printed instructions which give them the actual rows on which to do the shapings on each side. Experienced knitters will perhaps want to use the figures on the charts, but should remember that the printed instructions are there to use as well. The bind-offs for the armhole, the neck and shoulder shapings, when made on every other row, can always be made using short rows, and for this see your Instruction Manual or the KNITKING "Practical Knitting Hints" book.

The letters SR shown in front of sts. on bust darts, collars etc., means: KNIT SHORT ROWS. A number in a box stands for the number of rows to be knitted between shapings. Make shaping first, then knit the necessary number of rows. If for instance it reads: 1 st. 8 x

6

1 st. 10 x

8

As you will be reading the instructions from the bottom up, here is the way you will follow them:. Decrease or increase (depending on the direction of the garment outline) 1 st. at the row where the shaping begins, then knit 8 rows, make the next decrease, then knit 8 rows, until you have decreased (or increased) 1 st. 10 x and you have knitted 8 rows after each decrease (or increase) (1 st. 10 x + 8 rows 10 x). Now begin the first decrease (or increase) for the shaping (which has to be made 8 x) in every 6th row. Decrease(or increase 1 st. first, then knit 6 rows until you have decreased 1 st. 6 x and after each decrease (or increase) have knitted 6 rows (1 st. 8 x + 6 rows 8 x).

Where shapings are given without a boxed number as on most armholes, necklines, etc., make the shapings on every second row (on each side of course).

WAISTLINE DARTS

There is more than one way to make waistline darts. When using fine yarns, care has to be taken so that you do not break the yarn...this can happen if the sts. are moved in such a way as to leave 2 empty needles between stitches.... Here is a method that will give you a neat looking dart... We are using DK 7829 for an example. The darts begin at Row 254 and the sts. marked on the diagram are the 54th, 55th and 56th sts.on each side. For the RIGHT dart count from the RIGHT side, for the LEFT dart, count from the LEFT side. The 55th st. is the Dart center st., pull this needle out into holding posi-

tion. Release all the sts. which have to be moved, from under the sinkers. Hang the 54th and 56th sts. onto the Dart center st. (the 55th st.). On each side of the dart sts., there is now 1 empty needle and these needles have to be filled. Insert the 33 needle Transfer Tool into the first adjacent 33 sts. (the 21st -53rd sts.) and slip the sts. onto the tool. Holding the tool with the 33 sts. in your left hand, use the single Transfer Tool in your right hand and transfer the 20th st. 1 needle inward. Still holding the tool with the 33 sts. in your left hand, move the dart sts. 1 needle over, toward the center, filling that empty needle, then hang the 33 sts. from the tool next to this. As you will notice, there is never 2 empty needles between sts. Now insert the 33 needle Transfer Tool into the remaining 19 sts.on the outside, slip the sts.onto the tool, insert the single Transfer Tool into the single st., and move this st. and the 19 sts. on the other tool over to fill the empty spaces. The following decreases for the darts are directly above the first decrease. The center dart st is always your guide. To increase for the dart, reverse the procedure. Pull out the center dart needle to holding position, release the sts. to be moved, from under the sinkers. Move the end sts. in excess of 33 sts.first, then the remaining sts. In this way, you will always have I empty needle between sts. Cast on a sufficient number of sts., knit about 50 rows, then practice making the darts, using DK 7829 for an example....

HOW TO ALTER THE LENGTH OF SKIRTS AND DRESSES

The length of a straight dress or skirt is altered as follows: To shorten: Check your row gauge, then set the Row Counter ahead as many rows as are needed to make up the amount by which the skirt or dress is to be shortened, then follow the instructions as written. To lengthen: knit the number of rows which make up the amount by which the dress or skirt has to be lengthened, then set the Row Counter back to 0 and follow the instructions as written. If the dress or skirt is shaped, as in DK 7837, proceed as follows: To shorten: knit to the Row which denotes the hem and hem allowance, which in this case is Row 48. Now set the Row Counter ahead to Row 72 which will shorten the dress by 2". If less than 2" are desired, set the Row Counter ahead less rows, then follow the instructions as written. If more than 2" is needed to shorten the dress, see how many rows are to be knit-ted between decreases. On DK 7837, the first decrease is at Row 72, the following decrease at Row 82, then 92, etc. Each additional 10 rows gives you about 1" of length. To be able to follow the instructions and have the same amount of stitches at critical points, proceed as follows: To shorten the dress by 3", cast on 2 less stitches which are the sts. which would have been decreased at Row 72. Now knit to Row 48, then set the Row Counter to 82 and follow the instructions as written. To shorten the dress by 4", cast on 4 less sts., knit to Row 48, then set the Row Counter to 92 and follow the instructions as written, etc...To lengthen a dress or skirt, knit to the Row which denotes the hem and hem allowance, then knit the rows which are needed for the additional length, set the Row Counter back to the hem row and follow the instructions as they are written.

OUR READERS WRITE

One of the most commonly asked questions in correspondence from readers is: "What is the difference between Double bed machines and Single bed machines with Ribbing attachments?"....We always reply to such questions with an excerpt from an article that appeared in KNITKING MAGAZINE several years ago.... So for the benefit of our many thousands of new readers, we are reproducing the Excerpt:....

DOUBLE BED or SINGLE BED with RIBBER

Many people investigating knitting machines for the first time are confused by the difference between so called double bed machines and single bed machines with ribbers. There is a tendency to believe that the double bed machine must be more versatile than a single bed simply because a double bed has two identical beds. In actual fact quite the reverse is the case. More fancy stitches and pattern designs can be made on a push-button KNIT-KING with Coordinated Ribber than on any other knitting machine and they can be knitted with ease and simplicity without cumbersome weights and innumerable attachments.

Most Sales Representatives offering double bed machines exphasize the fact that their machines knit tubular but they conveniently neglect to explain that it can only be knitted in stockinette stitch with no mixing of colors or fancy designs. It is not possible to knit tubular ribbing on any home knitting machine but thousands of purchasers of such machines did not discover that fact until after purchasing one.

Double bed machines are patterned after industrial machines used by experts with extensive training. They invariably have to be clamped to a table or a specially constructed steel frame and usually need up to 30 pounds in weight hanging from the bottom edge of the knitting. These weights make it difficult to sit comfortably in front of the knitter and they have to be re-hung every time the knitting reaches the floor KNITKING machines can be easily put away with knitting hanging from them but the same cannot be said in regard to double bed machines.

We want to emphasize the fact that double bed machines for home use have a place in our industry and for some people they are the right type of machine but we caution anyone buying a machine for the first time and knitters who are considering trading their old machines for later models, to check on the availability of patterns, parts and service for any machine that sounds interesting. Find out if the machine is really versatile and will knit all types of yarns, both plain and fancy. In fact, we recommend that you adopt the advice of the Better Business Bureau and "investigate before you invest."

PRE-INVENTORY SALE

We mailed to all magazine subscribers a special edition of KNITKING NEWS with information about our annual Pre-Inventory Sale. If you have not received a copy by the time this magazine reaches you, drop us a line and we will be happy to send you a copy....



ARE YOU UNHAPPY WITH YOUR PRESENT KNITTING MACHINE

DOES IT REFUSE TO KNIT FANCY DRESS YARNS?

DOES IT JAM UP WHEN YOU TRY TO KNIT LOOPED MOHAIR OR THICK AND THIN YARNS?
DOES IT DROP STITCHES ALL OVER THE PLACE?

ARE YOU CONTINUALLY HAVING TROUBLE WITH AWKWARD, CUMBERSOME WEIGHTS?

ARE YOU UNABLE TO MAKE A LARGE GARMENT WITH BULKY YARNS?

DO YOU HAVE TO SELECT PATTERN STITCHES MANUALLY?

DO YOU HAVE TO LATCH YOUR RIBBING BY HAND?

IF YOU ARE HAVING ANY OF THESE PROBLEMS YOU SHOULD TRADE UP TO A NEW FAN-TASTIC PUSH BUTTON KNITKING WITH COORDINATED RIBBER AND ENJOY KNITTING WITH THE WORLDS FINEST, MOST VERSATILE AND MOST AUTOMATIC KNITTER.

YOU WILL BE SURPRISED AT OUR GENEROUS TRADE-IN ALLOWANCE AND YOU CAN, IF YOU WISH, USE YOUR PRESENT MACHINE AS A DOWN-PAYMENT AND PURCHASE A COMPLETE KNITKING FOR JUST PENNIES A DAY. WRITE TODAY FOR FULL INFORMATION AND TELL US WHAT MACHINE YOU NOW OWN. THE ADDRESS IS:

KNITKING, Dept. 1-1, 1128 Crenshaw Blvd., Los Angeles, Calif. - 90019

NOTES TO KNIT BY . . .

STITCH AND ROW GAUGE

KNIT A SAMPLE SWATCH . . . before you begin to knit any garment . . . for this is the MOST IMPORTANT STEP toward the correct size and the proper fit of any garment you wish to make. You MUST use the SAME YARN for your sample swatch that you will use to knit your garment and your sample swatch must be knitted large enough and using several different tension numbers on your machine. When you have done this, then you can determine the number of stitches and the number of rows in a two-inch measure. KNITKING MAGAZINE PATTERNS give you 3 tensions to try and one of them should give you the correct stitch and row gauge if you are using the yarn we recommend or a similar weight yarn. Here is the way to make your sample swatch.

Cast on over a sufficient number of needles to produce a swatch at least 4 inches wide. (If the pattern calls for 16 stitches to 2", then $16 \times 2 = 32$ stitches to cast on). Now knit 4 inches of rows at the first suggested tension number. (If the pattern calls for 22 rows to 2", $22 \times 2 = 44$ rows to knit). Knit 2 rows using a contrast color, change to the next higher tension and with garment yarn knit another 4", knit 2 rows with contrast color, change to the 3rd higher tension and knit another 4" and then bind off.

Roll the swatch into a cylinder over its length and pull on both ends, unroll it and stretch it diagonally by pulling on the four corners. Allow the swatch to rest and settle (preferably overnight) and then using a stitch gauge or a ruler, count the number of stitches over a 2" width, then the number of rows over a 2" length in EACH of the 3 tensions. Select the tension number that produces the stitches and rows called for in the pattern. If none of them are correct, you are most likely using the wrong weight of yarn.

READING OF CHARTS

You will notice the instructions start at the bottom of the Chart and work UP. Follow the charts exactly as written and providing your sample stitch and row gauge is correct, your garment will come out the right size. Please remember that the section of garment as it is knitted on the machine, faces the same way as the Charts are in this magazine. Where two front pieces are needed, (or any other part of a garment that needs two sections) only one section is normally shown and the second section is sometimes made with reverse shaping. Set in sleeves are usually identical, but raglan sleeves have to be knitted with reverse shaping for the second sleeve.

Combale are used on Line Drawings of Dettorn stitches to show th

READING OF SYMBOLS


position of the needles and the variety of stitches used for Pattern knitting	ng
These Symbols are drawn and are to be read as you look at them wh	
knitting the garment. For instance: if a Purl stitch faces you, the Purl stit	
Symbol is shown; if a knit stitch faces you (as when using t	the
ribber) then this Symbol is shown. The Line Drawings for patter	ern
stitches are to be read and set up on your machine from RIGHT to LEI unless otherwise stated in the individual instructions.	FT
In EYELET design Patterns at transferred to an adjacent needle and the empty needles are returned to tworking position. The drawings have row numbers on the RIGHT significant Missing Row Numbers are ALWAYS knitted straight or plain.	the
In HOLDING POSITION DESIGNS selected needles are push into holding position for the stated number of rows. The numbers of row appear at the right of the Line Drawings. Example: 1—4 means knit rows to 4; 5—7 means knit rows 5 to 7; 8—12 means knit rows 8 to 12, etc. etc.	s 1
(See below for more Pattern Stitch Symbols.)	

BLOCKING and ASSEMBLING GARMENTS

Block each section of your knitting separately BEFORE assembling any garment. This not only makes putting your garment together much easier but gives it that professional look of perfection. For the correct assembly of garments and all other important information regarding machine knitting, refer to our book" Practical Knitting Hints."

PATTERN STITCH SYMBOLS = needle in the holding position = knit stitch 2 stitches on 1 needle needle holding 2 stitches. either transferred from the Stitch has been transferred = purl stitch from the RIGHT right side or the left side, then put the needle into holding position 3 stitches on 1 needle. The = empty needle (leave in working position) 1st and 3rd stitch in a needle holding 2 stitches. group of 3 needles has been Stitch has been transferred needle not used (in the out hung on the 2nd or center from the LEFT of work position) needle. The diagrams (Line Drawings) for pattern work are followed just as they are shown and are to be read as you look at them while knitting the garment. open darts closed darts

yarus kmitking

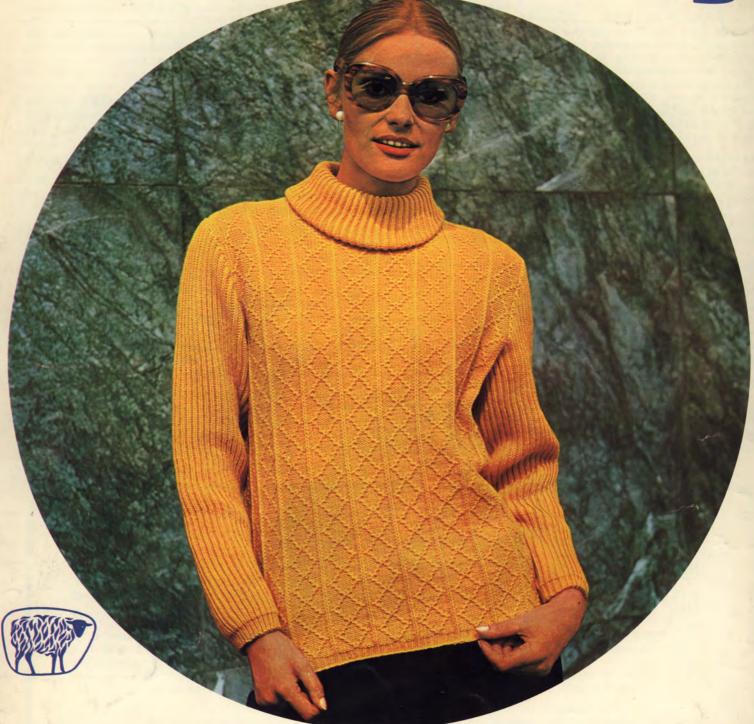

For perfect garments you need perfect yarns...All of the garments in KNITKING MAGAZINE are made with gorgeous KNITKING YARNS...and they are available to you at approximately half what you would pay for comparable yarns at your local department store...A big beautiful KNITKING Yarn Catalogue with 300 actual samples, in an assortment of colors you will not find elsewhere, literally costs you nothing...the two dollars you pay is deducted from your first ten dollar order. Send for your catalogue today.